

Push-In Fittings

LF 3000®

LF 3200: 3 mm

LIQUIfit®

LF 3600

LF 3800/ LF 3900

LF 6100



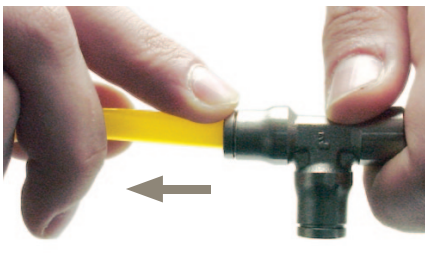
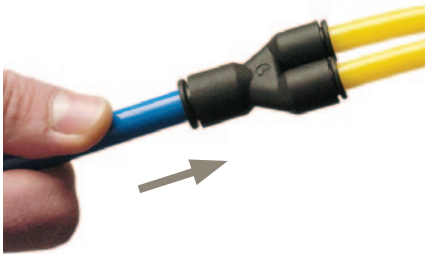


Principle and Advantages of the Push-In Fitting

The **push-in fitting** is the most intuitive way of connecting tubes to a fitting in order to create a fluid distribution network. Thanks to its **quick installation**, versatility and **exceptional lifespan**, the push-in fitting contributes to improving machine efficiency. Moreover, the advanced patented design of the LF 3000® contributes to reducing **total cost of use**.

Connection

- Manual connection and disconnection without the use of tools
- Release button available in 5 colours, to identify different circuits




Assembly

All straight connectors are fitted with an internal hexagon for ease of assembly with the use of an Allen spanner. This enables assembly in restricted spaces.

Threads

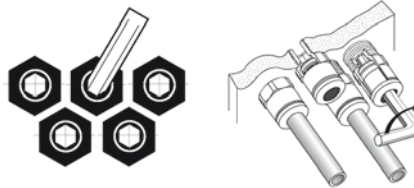


BSPP
and metric



BSPT, NPT
and NPTF

Close Porting Assembly



Our fittings are designed for internal (above) or external assembly.

Sealing and 100 % Leak-Tested

The quality of the sealing material, selected specifically for the application, ensures excellent longevity of the fitting. In this way, Parker Legris offers the best return on investment on the market.

Quality of Design


- Unique and patented sealing technology
- Rigorous selection of materials:
NBR: ideally suited for compressed air
EPDM: perfectly suited for food and beverage
FKM: all fluids and high temperatures
- 100 % leak-tested in the production process

Benefits of Use

- The lowest leak rate on the market, whatever the temperature and length of use
- Perfectly suited to primary vacuum
- Full bore for optimum flow
- Optimum gripping of tube guaranteed

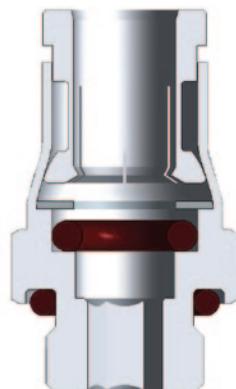
Gripping Ring Technology

- Ideal for polymer tubing, even for soft tubing
- Excellent tube guidance
- No tube movement under pressure
- Very compact solution



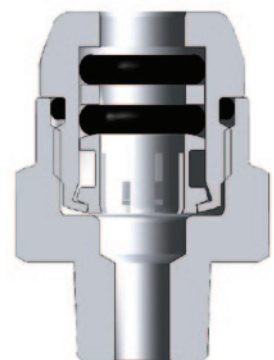
Gripping with Collet

- For polymer and grooved metal tubing (groove drawings available on request)
- Resistant to high pressure, excellent lifespan
- Robust solution for harsh environments



Gripping with Reversed Collet

- For rigid polymer and grooved metal tubing
- Resistant to high pressure
- Excellent durability
- Optimum sealing



Push-In Fittings

LF 3000® Push-In Fittings

[P. 1-4]



Fluids: compressed air

Materials: technical polymer, nickel-plated brass, NBR

Pressure: 20 bar

Temperature: -20°C to +80°C

Ø metric: 3 mm to 16 mm

Ø inch: 1/8" to 1/2"

LF 3200 3 mm Push-In Fittings

[P. 1-39]



Fluids: compressed air, non-corrosive fluids

Materials: chemical nickel-plated brass, NBR

Pressure: 20 bar

Temperature: -15°C to +80°C

Ø metric: 3 mm

LIQUIfit® Push-In Fittings

[P. 1-44]



Fluids: water, beverages, coolants, inert gases

Materials: biopolymer, EPDM

Pressure: 16 bar

Temperature: -10°C to +95°C

Ø metric: 4 mm to 12 mm

Ø inch: 5/32" to 1/2"

LF 3600 Push-In Fittings

[P. 1-65]



Fluids: compressed air, slightly corrosive industrial fluids

Materials: high phosphorus nickel-plated brass, FKM

Pressure: 30 bar

Temperature: -20°C to +150°C

Ø metric: 4 mm to 14 mm

LF 3800/LF 3900 Push-In Fittings

[P. 1-77]



Fluids: industrial fluids, chemicals, medical fluids, beverages

Materials: stainless steel, FKM

Pressure: 30 bar

Temperature : -20°C to +150°C

Ø metric: 4 mm to 12 mm

Ø inch: 3/16" to 1/2"

LF 6100 Push-In Fittings

[P. 1-89]



Fluids: compressed air, oil, water

Materials: brass, NBR

Pressure: 60 bar

Temperature: -40°C to +120°C

Ø metric: 4 mm to 10 mm

For more details on these ranges, you will find a selection guide in the "Introduction" section of this catalogue.

LF 3000® Push-In Fittings Range

Stud Fittings

Straights

3175
BSPT/NPT
Page 1-7



3101
BSPP/Metric
Page 1-8



3181
Metric
Page 1-8



3114
BSPP/Metric
Page 1-9



3121
BSPT/NPT
Page 1-9



3131
BSPP/Metric
Page 1-10



Straights - Inch

3175
NPT/BSPT
Page 1-7/8



3121
NPT
Page 1-9



Elbows

3109
BSPT/NPT
Page 1-10



3199
BSPP/Metric
Page 1-11



3192
BSPP
Page 1-12



3129
BSPT
Page 1-12



3169
BSPP/Metric
Page 1-13



3113
BSPT
Page 1-13



3133
BSPP/Metric
Page 1-13



Elbows - Inch

3109
NPT/BSPT
Page 1-11



Tees

3108
BSPT
Page 1-14



3198
BSPP/Metric
Page 1-14



3103
BSPT
Page 1-14



3193
BSPP/Metric
Page 1-15



Y

3148
BSPT
Page 1-15



3158
BSPP/Metric
Page 1-15



3112
BSPT
Page 1-16



3132
BSPP
Page 1-16



Cartridge

3100
Carstick®
Page 1-16



Cartridge - Inch

3100
Carstick®
Page 1-16



Tube-to-Tube Fittings

Straight

3106
Page 1-17



Straight - Inch

3106
Page 1-17



Elbow

3102
Page 1-17



Elbow - Inch

3102
Page 1-17



Tee

3104
Page 1-18



Tee - Inch

3104
Page 1-18



Y

3140
Page 1-18



Cross

3107
Page 1-19



Bulkhead Connector Fittings

Straights

3116
Page 1-20



3146
Page 1-20



3136
Page 1-20



Elbow

3139
Page 1-20



Multiple Fittings

Y

3144
Page 1-21



Tee

3304
Page 1-21



Elbow

3306
Page 1-21



Manifold

3310
Page 1-21



LF 3000® Push-In Fittings Range

LF 3000®

Push-In Fittings

Plug-In Fittings and Accessories

Elbows

3182
Page 1-22

3184
Page 1-22

3180
Page 1-22

Tees

3183
Page 1-23

3188
Page 1-23

Y

3142
Page 1-23

3143
Page 1-23

Elbows - Inch

3182
Page 1-22



Accessories

3120
Page 1-24

3166
Page 1-24

3168
Page 1-24

3126
Page 1-25

3122
Page 1-25

3151
Page 1-25

Accessories - Inch

3166
Page 1-24

3168
Page 1-24

3126
Page 1-25



Banjo Fittings

Banjo Fittings

3118
BSPP/Metric
Page 1-27

3018
BSPT
Page 1-27

3124
BSPP/Metric
Page 1-27

3149
BSPP/Metric
Page 1-27

3119
BSPP/Metric
Page 1-27



Modular Banjo Fittings

3538
Single Body
Page 1-28

3539
Double Body
Page 1-28

3549
Y Body
Page 1-28

3527
BSPP/Metric
Page 1-29

3528
BSPP/Metric
Page 1-29

3529
BSPP
Page 1-29

3524
BSPP/Metric
Page 1-29



Multi-Connectors

3300
Page 1-31

3320
Page 1-31

3321
Page 1-31

3329
Page 1-31

3379
Page 1-32

3381
Page 1-32



Self-Sealing and Oscillating Fittings

Self-Sealing Fittings

3391
BSPP
Page 1-35

3091
BSPT
Page 1-35

3160
Page 1-35

3159
BSPT
Page 1-35

3189
BSPP/Metric
Page 1-35



Oscillating Fittings

Accessories for Push-In Fittings

3130
Page 1-37

Clip
Page 1-37

3000 70
Page 1-37

3110
Page 1-37

0178
BSPP/Metric
Page 1-37

0222
BSPP/Metric
Page 1-37



LF 3000® Push-In Fittings

The LF 3000® range, with its wide variety of shapes and configurations, allows you to find **the perfect product to meet your needs** and thus **optimise the use** of your equipment.

Product Advantages

World-Class Performance

- 40 years of expertise
- Full bore for optimum flow
- Ideal for vacuum or pressure applications
- Automatic sealing guaranteed, in both static and dynamic applications
- Materials with high resistance
- Durability of product and equipment

Optimal Design

- 100% leak-tested in production
- Date coding to guarantee quality and traceability
- Compact and aesthetic design: reduced dimensions for space-saving
- Tube fixed during connection, preventing leakage
- Conforms to ISO 14743
- Excellent vacuum performance thanks to the patented sealing technology
- Lightweight: reduced energy consumption of operating systems
- Parallel threaded fitting with a patented captive O-ring seal
- Maximum flexibility due to the wide product range



Applications

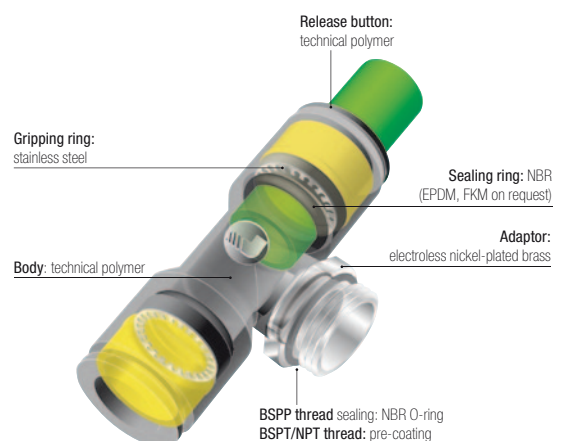
- Robotics
- Automotive Process
- Pneumatics
- Semi-Conductors
- Textile
- Packaging
- Vacuum

Technical Characteristics

Compatible Fluids	Compressed air Other fluids: please consult us								
Working Pressure	Vacuum to 20 bar								
Working Temperature	-20°C to +80°C								
Tightening Torque (daN.m)	Threads								
	M3 x0.5	M5 x0.8	M7 x1	M10 x1	M12 x1.5	G1/8	G1/4	G3/8	G1/2
	0.06	0.16	0.8	0.8	1.1	0.8	1.2	3	3.5

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.
Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

Component Materials



Silicone-free

Regulations

ISO 14743: Pneumatic fluid power, push-in connectors for thermoplastic tubes
DI: 97/23/EC (PED)

DI: 2002/95/EC (RoHS), 2011/65/EC
DI: 1907/2006 (REACH)

Stud Fittings

3175 Stud Fitting, Male BSPT Thread

ØD	C		F1	F2	H	kg
4	R1/8	3175 04 10	10	3	9.5	0.005
	R1/4	3175 04 13	14	3	6.5	0.012
	R3/8	3175 04 17	17	3	8	0.024
6	R1/8	3175 06 10	10	4	11.5	0.005
	R1/4	3175 06 13	14	4	8.5	0.011
	R3/8	3175 06 17	17	4	8.5	0.022
8	R1/2	3175 06 21	21	4	9	0.043
	R1/8	3175 08 10	13	5	20	0.011
	R1/4	3175 08 13	14	6	17	0.014
10	R3/8	3175 08 17	17	6	13	0.021
	R1/2	3175 08 21	21	6	12	0.040
12	R1/8	3175 10 10	16	5	22.5	0.017
	R1/4	3175 10 13	16	7	20	0.017
	R3/8	3175 10 17	17	8	16.5	0.019
14	R1/2	3175 10 21	21	8	14	0.037
	R1/4	3175 12 13	19	7	26.5	0.029
	R3/8	3175 12 17	19	9	24	0.028
16	R1/2	3175 12 21	21	10	19.5	0.036
	R3/8	3175 14 17	22	9	28.5	0.043
	R1/2	3175 14 21	24	10	23.5	0.047
16	R3/8	3175 16 17	27	9	32.5	0.068
	R1/2	3175 16 21	27	12	32.5	0.079

Pre-coated thread

3175 Stud Fitting, Male NPT Thread

ØD	C		F1	F2	H	kg
6	NPT1/8	3175 06 11	11	4	11.5	0.006
	NPT1/4	3175 06 14	14	4	8.5	0.012
	NPT1/4	3175 10 14	16	7	20	0.018
10	NPT3/8	3175 10 18	18	8	16.5	0.023
	NPT1/2	3175 10 22	22	8	14	0.037
12	NPT3/8	3175 12 18	19	9	24	0.030
	NPT1/2	3175 12 22	22	10	19.5	0.037

Pre-coated thread

3175 Stud Fitting, Male NPT Thread

Inch

ØD	C		F1	F2	H	kg
1/8	NPT1/8	3175 53 11	11	2	7.2	0.006
	NPT1/4	3175 53 14	14	2	8	0.016
1/4	NPT1/8	3175 56 11	11	4	11.9	0.006
	NPT1/4	3175 56 14	14	4	9.4	0.013
	NPT3/8	3175 56 18	18	5	7.6	0.024
3/8	NPT1/8	3175 60 11	16	4	22.7	0.019
	NPT1/4	3175 60 14	16	7	20.5	0.019
	NPT3/8	3175 60 18	18	7	17.5	0.026
1/2	NPT3/8	3175 62 18	22	9.5	25.9	0.047
	NPT1/2	3175 62 22	24	9.5	22.1	0.064

Pre-coated thread

Other products are available upon request; please do not hesitate to consult us.

Stud Fittings


3175

Stud Fitting, Male BSPT Thread

Inch



Nickel-plated brass, NBR



	ØD	C		F1	F2	H	kg
1/8	3/16	R1/8	3175 53 10	11	3	8.5	0.005
		R1/8	3175 55 10	11.1	3.2	15.5	0.009
		R1/4	3175 55 13	14.3	4	15	0.020
1/4	3/8	R1/8	3175 56 10	11	4	12	0.006
		R1/4	3175 56 13	14	4	9.5	0.021
		R1/4	3175 60 13	18	5	7.5	0.017
3/8	1/2	R3/8	3175 60 17	13	5	20	0.019
		R1/2	3175 60 21	14	6	16.8	0.061
		R1/4	3175 62 13	22	6	26.9	0.044
1/2		R3/8	3175 62 17	22	7	25.9	0.048
		R1/2	3175 62 21	24	7	20.5	0.049

Pre-coated thread

Pre-coated thread

3101

Stud Fitting, Male BSPP and Metric Thread

	ØD	C						kg
				E	F1	F2	H	
	3	M3x0.5	3101 03 09*	2.5	8	-	12.5	0.003
		M5x0.8	3101 03 19	3.5	8	2.5	12.5	0.004
	4	M3x0.5	3101 04 09*	2.5	8	-	14.5	0.003
		M5x0.8	3101 04 19	3	9	2.5	14	0.003
	6	M7x1	3101 04 55	5	10	2.5	14	0.004
		G1/8	3101 04 10	5	13	3	11.5	0.007
	8	G1/4	3101 04 13	5.5	16	3	10.5	0.011
		M5x0.8	3101 06 19	3	11	2.5	16	0.005
	10	M7x1	3101 06 55	5	10	3	16	0.006
		M10x1	3101 06 60	5	13	4	13	0.007
	12	M12x1.5	3101 06 67	5.5	15	4	13	0.009
		G1/8	3101 06 10	5	13	4	13	0.007
	14	G1/4	3101 06 13	5.5	16	4	12.5	0.011
		G3/8	3101 06 17	5.5	20	4	13	0.020
	16	G1/2	3101 06 21	7.5	24	4	20	0.040
		M10x1	3101 08 60	5	13	5	21	0.011
	18	M12x1.5	3101 08 67	5.5	15	5	21	0.015
		G1/8	3101 08 10	4.5	13	5	20.5	0.011
	20	G1/4	3101 08 13	5.5	16	6	19.5	0.016
		G3/8	3101 08 17	5.5	20	6	18	0.022
	22	G1/2	3101 08 21	7.5	24	6	16.5	0.039
		G1/4	3101 10 13	5.5	16	7	23	0.018
	24	G3/8	3101 10 17	5.5	20	8	19.5	0.021
		G1/2	3101 10 21	7.5	24	8	18.5	0.033
	26	G1/4	3101 12 13	5.5	19	7	27.5	0.027
		G3/8	3101 12 17	5.5	20	9	27	0.029
	28	G1/2	3101 12 21	7	24	11	22.5	0.035
		G3/8	3101 14 17	5.5	22	9	29.5	0.041
	30	G1/2	3101 14 21	7	24	11	28	0.047
		G3/8	3101 16 17	7.5	27	9	32.5	0.061
		G1/2	3101 16 21	9	27	12	32.5	0.066


* Bi-material O ring seal

3181

Stud Fitting Round Body, Male Metric Thread

	ØD	C						kg
				E	F	G	H	
	4	M5x0.8	3181 04 19	3.5	2.5	8.5	14.5	0.005
		M7x1	3181 04 55	5	3	10	14	0.004
	6	M5x0.8	3181 06 19	3.5	2.5	11	16	0.007
		M7x1	3181 06 55	5	3	10	16	0.005

The internal hexagon and circular external shape ensure that model 3181 provides highly compact assembly.
They can be easily installed with an Allen key without the need of a spanner.



Stud Fittings

LF 3000®

Push-In Fittings

3114 Stud Fitting, Female BSPP and Metric Thread

ØD	C					
			E	F	H	kg
4	M5x0.8	3114 04 19	6.5	8	19.5	0.005
	G1/8	3114 04 10	9.5	13	22.5	0.010
	G1/4	3114 04 13	13.5	16	26.5	0.015
6	G1/8	3114 06 10	9.5	13	24.5	0.011
	G1/4	3114 06 13	13.5	16	28.5	0.017
8	G1/8	3114 08 10	9.5	13	29	0.015
	G1/4	3114 08 13	13.5	16	33	0.021
10	G3/8	3114 08 17	14	19	34	0.025
	G1/4	3114 10 13	13.5	16	36	0.027
	G3/8	3114 10 17	14	19	36	0.027
12	G1/2	3114 10 21	19.5	24	41.5	0.048
	G3/8	3114 12 17	14	19	40	0.033
14	G1/2	3114 12 21	19.5	24	45.5	0.052
	G3/8	3114 14 17	14	22	42.5	0.057
16	G1/2	3114 16 21	15	27	49	0.096

3121 Stud Standpipe, Male BSPT Thread

ØD	C		F	H	H1	kg
4	R1/8	3121 04 10	10	26	14	0.005
	R1/4	3121 04 13	14	26.5	14.5	0.014
6	R1/8	3121 06 10	10	28	14	0.005
	R1/4	3121 06 13	14	28.5	14.5	0.014
8	R1/8	3121 08 10	10	29.5	11	0.006
	R1/4	3121 08 13	14	28.5	10	0.012
10	R3/8	3121 08 17	17	28.5	10	0.015
	R1/4	3121 10 13	15	36	15.5	0.012
	R3/8	3121 10 17	17	36	15.5	0.017
12	R1/2	3121 10 21	21	36	15.5	0.028
	R3/8	3121 12 17	17	36.5	12	0.018
14	R1/2	3121 12 21	21	36.5	12	0.028
	R1/2	3121 14 21	21	41	13.5	0.042

Pre-coated thread

3121 Stud Standpipe, Male NPT Thread

ØD	C		F	H	H1	kg
4	NPT1/8	3121 04 11	11	25.9	14.5	0.007
	NPT1/4	3121 04 14	14	26.4	15	0.017
8	NPT1/8	3121 08 11	11	29.5	10.9	0.008
	NPT1/4	3121 08 14	14	28.4	9.9	0.014

Pre-coated thread
5/32" (4 mm) and 5/16" (8 mm) are also available

3121 Stud Standpipe, Male NPT Thread

Inch

ØD	C		F	H	H1	kg
1/4	NPT1/8	3121 56 11	11	30	15.5	0.001
	NPT1/4	3121 56 14	14	28.4	14.5	0.001
3/8	NPT1/8	3121 60 11	15	44.4	16.5	0.013
	NPT1/4	3121 60 14	15	36.1	17	0.014
1/2	NPT3/8	3121 60 18	18	36.1	15.5	0.023
	NPT3/8	3121 62 18	17	36.6	9.4	0.026
	NPT1/2	3121 62 22	21	37.1	9.9	0.046

Pre-coated thread
5/32" (4 mm) and 5/16" (8 mm) are also available

Stud Fittings

3131

Stud Standpipe, Male BSPP and Metric Thread

ØD	C		E	F	H	H1	kg
4	M5x0.8	3131 04 19	3.5	8	31	16	0.002
	G1/8	3131 04 10	5	13	30	13.5	0.005
	G1/4	3131 04 13	5.5	16	31	13.5	0.010
6	G1/8	3131 06 10	5	13	32	13.5	0.005
	G1/4	3131 06 13	5.5	16	33	13.5	0.010
8	G1/8	3131 08 10	5	13	35.5	12.5	0.008
	G1/4	3131 08 13	5.5	16	34.5	10.5	0.010
	G3/8	3131 08 17	5.5	20	34.5	10.5	0.015
10	G1/4	3131 10 13	5.5	16	43.5	17.5	0.012
	G3/8	3131 10 17	5.5	20	41.5	15.5	0.015
	G1/2	3131 10 21	7.5	24	41.5	15.5	0.024
12	G3/8	3131 12 17	5.5	20	42	12	0.015
	G1/2	3131 12 21	7	24	43.5	12	0.025
14	G3/8	3131 14 17	5.5	20	46.5	14	0.018
	G1/2	3131 14 21	7	24	48	13.5	0.025

3109

Stud Elbow, Male BSPT Thread

ØD	C		F	G	H	L	kg
4	R1/8	3109 04 10	10	8.5	13.5	14	0.006
	R1/4	3109 04 13	14	8.5	14	14	0.015
	R3/8	3109 04 17	17	8.5	13.5	14	0.018
6	R1/8	3109 06 10	10	10.5	15.5	16	0.006
	R1/4	3109 06 13	14	10.5	16	16	0.015
	R3/8	3109 06 17	17	10.5	16	16	0.019
8	R1/2	3109 06 21	21	10.5	16.5	16	0.034
	R1/8	3109 08 10	10	13.5	19	23	0.007
	R1/4	3109 08 13	14	13.5	18	23	0.014
10	R3/8	3109 08 17	17	13.5	18	23	0.018
	R1/2	3109 08 21	21	13.5	19.5	23	0.033
	R1/8	3109 10 10	15	16	23	26.5	0.012
12	R1/4	3109 10 13	15	16	22	26.5	0.014
	R3/8	3109 10 17	17	16	22	26.5	0.019
	R1/2	3109 10 21	21	16	22	26.5	0.031
14	R1/4	3109 12 13	15	19	25	31	0.016
	R3/8	3109 12 17	17	19	25	31	0.022
	R1/2	3109 12 21	21	19	25	31	0.033
16	R3/8	3109 14 17	20	22	30.5	35.5	0.031
	R1/2	3109 14 21	24	22	28.5	35.5	0.041
	R3/8	3109 16 17	27	27	53	39	0.106
	R1/2	3109 16 21	27	27	53	39	0.104

Pre-coated thread
The body swivels for positioning purposes.

3109

Stud Elbow, Male NPT Thread

ØD	C		F	G	H	L	kg
4	NPT1/8	3109 04 11	11	8.4	13.5	14	0.007
	NPT1/4	3109 04 14	14	8.4	14	14	0.016
6	NPT1/8	3109 06 11	11	10.5	15.5	16	0.007
	NPT1/4	3109 06 14	14	10.5	16	16	0.017
8	NPT1/8	3109 08 11	11	13.5	19	23.1	0.009
	NPT1/4	3109 08 14	14	13.5	18	23.1	0.015
10	NPT1/4	3109 10 14	15	16	23	26.5	0.017
	NPT3/8	3109 10 18	18	16	22	26.5	0.024
	NPT1/2	3109 10 22	22	16	23	26.5	0.045
12	NPT3/8	3109 12 18	18	19	25	31	0.050
	NPT1/2	3109 12 22	22	19	26	31	0.092

Pre-coated thread
The body swivels for positioning purposes.

Stud Fittings


LF 3000®

Push-In Fittings

3109

Stud Elbow, Male NPT Thread

Inch


	Technical polymer, nickel-plated brass, NBR	ØD	C		F	G	H	L	kg
		1/8	NPT1/8	3109 53 11	11	8.5	13.5	14.5	0.007
			NPT1/4	3109 53 14	14	8.5	14	14.5	0.015
		1/4	NPT1/8	3109 56 11	11	10.9	17	18	0.007
			NPT1/4	3109 56 14	14	10.9	16	18	0.014
			NPT3/8	3109 56 18	18	10.9	16.5	18	0.021
			NPT1/8	3109 60 11	15	16	23.1	27.4	0.014
		3/8	NPT1/4	3109 60 14	15	16	23.1	27.4	0.017
			NPT3/8	3109 60 18	18	16	22.1	27.4	0.023
		1/2	NPT3/8	3109 62 18	20	22.1	31	35.1	0.041
			NPT1/2	3109 62 22	24	22.1	28.4	35.1	0.054

Pre-coated thread - 5/32" (4 mm) and 5/16" (8 mm) are also available.
The body swivels for positioning purposes.

3109

Stud Elbow, Male BSPT Thread


Inch

	Technical polymer, nickel-plated brass, NBR	ØD	C		F	G	H	L	kg
		1/8	R1/8	3109 53 10	10	8.5	13.5	14.5	0.011
			R1/8	3109 55 10	11	10.9	17	21.6	0.010
		3/16	R1/4	3109 55 13	14	8.4	14	14	0.016
			R1/8	3109 56 10	10	10.9	17	18	0.006
		1/4	R1/4	3109 56 13	14	10.9	17	18	0.013
			R1/4	3109 60 13	15	16	22.1	26.4	0.016
		3/8	R3/8	3109 60 17	17	16	22.1	26.4	0.054
			R1/4	3109 62 13	20	22.1	31	35.1	0.064
		1/2	R3/8	3109 62 17	20	22.1	31	35.1	0.067
			R1/2	3109 62 21	24	22.1	28.4	35.1	0.046

Pre-coated thread
The body swivels for positioning purposes.
5/32" (4 mm) and 5/16" (8 mm) are also available.

3199

Stud Elbow, Male BSPP and Metric Thread

	Technical polymer, nickel-plated brass, NBR	ØD	C		E	F	G	H	L	kg
		3	M3x0.5	3199 03 09*	2.5	8	8.5	15	14.5	0.003
			M5x0.8	3199 03 19	3.5	8	8.5	13.5	14.5	0.003
			M3x0.5	3199 04 09*	2.5	8	8.5	15	14.5	0.002
			M5x0.8	3199 04 19	3.5	8	8.5	13.5	14	0.002
		4	M7x1	3199 04 55	4.5	10	8.5	15	14	0.005
			G1/8	3199 04 10	5	13	8.5	13	14	0.006
			G1/4	3199 04 13	5.5	16	8.5	13	14	0.011
			M5x0.8	3199 06 19	3.5	8	10.5	15.5	16	0.003
			M7x1	3199 06 55	4.5	10	10.5	17.5	16	0.006
			M10x1	3199 06 60	5	13	10.5	15	14	0.006
		6	M12x1.5	3199 06 67	5.5	15	10.5	15	16	0.009
			G1/8	3199 06 10	5	13	10.5	15	16	0.006
			G1/4	3199 06 13	5.5	16	10.5	15	16	0.011
			G3/8	3199 06 17	5.5	20	10.5	15.5	16	0.022
			G1/2	3199 06 21	7	24	10.5	16	16	0.027
			M10x1	3199 08 60	5	13	13.5	20.5	23	0.009
			M12x1.5	3199 08 67	5.5	15	13.5	19.5	23	0.009
			G1/8	3199 08 10	4.5	13	13.5	20.5	23	0.009
		8	G1/4	3199 08 13	5.5	16	13.5	18.5	23	0.012
			G3/8	3199 08 17	5.5	20	13.5	18.5	23	0.017
			G1/2	3199 08 21	7	24	13.5	19	23	0.027
			G1/4	3199 10 13	5.5	16	16	23.5	26.5	0.014
		10	G3/8	3199 10 17	5.5	20	16	22	26.5	0.017
			G1/2	3199 10 21	7.5	24	16	22	26.5	0.026
			G1/4	3199 12 13	5.5	16	19	26.5	31	0.016
			G3/8	3199 12 17	5.5	20	19	25	31	0.019
		12	G1/2	3199 12 21	7	24	19	25	31	0.029
			G3/8	3199 14 17	5.5	20	22	32.5	35.5	0.029
		14	G1/2	3199 14 21	7	24	22	27	35.5	0.028
			G3/8	3199 16 17	7.5	27	27	54.5	39	0.101
		16	G1/2	3199 16 21	9	27	27	54.5	39	0.097

The body swivels for positioning purposes.
*Bi-material seal

Stud Fittings


3192

Stud Elbow, Female BSPP Thread

	ØD	C		E	F	G	H	L	kg
	4	G1/8	3192 04 10	8.5	13	8.5	23	14	0.010
		G1/4	3192 04 13	11.5	16	8.5	27	14	0.017
	6	G1/8	3192 06 10	8.5	13	10.5	25	16	0.010
		G1/4	3192 06 13	11.5	16	10.5	29	16	0.017
	8	G1/8	3192 08 10	8.5	13	13.5	28	23	0.012
		G1/4	3192 08 13	11.5	16	13.5	32	23	0.020
		G3/8	3192 08 17	12	19	13.5	33	23	0.026
		G1/4	3192 10 13	11	16	16	34.5	26.5	0.020
	10	G3/8	3192 10 17	12	19	16	35	26.5	0.025
		G1/2	3192 10 21	16	24	16	41	26.5	0.049
	12	G1/4	3192 12 13	11	16	19	38	30.5	0.023
		G3/8	3192 12 17	12	19	19	38.5	30.5	0.027
		G1/2	3192 12 21	16	24	19	43.5	30.5	0.050

The body swivels for positioning purposes.

Technical polymer, nickel-plated brass, NBR




3129

Extended Stud Elbow, Male BSPT Thread

	ØD	C		F	G	H	L	kg
	4	R1/8	3129 04 10	10	8.5	23	19	0.008
		R1/4	3129 04 13	14	8.5	23.5	19	0.018
	6	R1/8	3129 06 10	10	10.5	27	22.5	0.010
		R1/4	3129 06 13	14	10.5	27.5	22.5	0.020
	8	R1/8	3129 08 10	13	13.5	34.5	29.5	0.018
		R1/4	3129 08 13	14	13.5	32.5	29.5	0.022
		R3/8	3129 08 17	17	13.5	33	29.5	0.032
		R1/4	3129 10 13	15	16	39.5	34.5	0.031
	10	R3/8	3129 10 17	17	16	39.5	34.5	0.041
		R1/2	3129 10 21	21	16	39.5	34.5	0.060
	12	R1/4	3129 12 13	19	19	45.5	40.5	0.035
		R3/8	3129 12 17	19	19	45.5	40.5	0.051
		R1/2	3129 12 21	21	19	45.5	40.5	0.065
		R3/8	3129 14 17	21	22	51.5	46.5	0.064
		R1/2	3129 14 21	21	22	51.5	46.5	0.070

Pre-coated thread
The body swivels for positioning purposes.

Technical polymer, nickel-plated brass, NBR



Parker Legris offers the solution to enable many types of configuration options.



Stud Fittings

3169

Extended Stud Elbow, Male BSPP and Metric Thread

ØD	C		E	F	G	H	L	kg
4	M5x0.8	3169 04 19	3.5	8	8.5	23	19	0.005
	M7x1	3169 04 55	4.5	10	8.5	22.5	19	0.008
	G1/8	3169 04 10	5	13	8.5	22.5	19	0.009
	G1/4	3169 04 13	5.5	16	8.5	22.5	19	0.014
6	M5x0.8	3169 06 19	3.5	10	10.5	27.5	23	0.008
	M7x1	3169 06 55	4.5	10	10.5	26	23	0.012
	G1/8	3169 06 10	5	13	10.5	27	23	0.011
	G1/4	3169 06 13	5.5	16	10.5	27	23	0.016
8	G1/8	3169 08 10	5	13	13.5	36	29.5	0.018
	G1/4	3169 08 13	5.5	16	13.5	33	29.5	0.020
	G3/8	3169 08 17	5.5	20	13.5	33	29.5	0.028
	G1/4	3169 10 13	5.5	16	16	40.5	34.5	0.029
10	G3/8	3169 10 17	5.5	20	16	40.5	34.5	0.037
	G1/2	3169 10 21	7.5	24	16	40.5	34.5	0.042
	G1/4	3169 12 13	5.5	19	19	44.5	40.5	0.049
	G3/8	3169 12 17	5.5	20	19	42	40.5	0.040
12	G1/2	3169 12 21	7.5	24	19	42	40.5	0.049
	G3/8	3169 14 17	5.5	22	22	51	46.5	0.059
	G1/2	3169 14 21	7.5	24	22	48.5	46.5	0.063
	G3/8	3169 16 17	7.5	27	27	82.5	52	0.220
16	G1/2	3169 16 21	9	27	27	82.5	52	0.206

The body swivels for positioning purposes.

3113

45° Elbow, Male BSPT Thread

ØD	C		F	G	H	L	kg
4	R1/8	3113 04 10	10	9	21	13	0.006
6	R1/8	3113 06 10	10	11	24.5	14.5	0.006
	R1/4	3113 06 13	14	11	25	14.5	0.015
8	R1/8	3113 08 10	10	13.5	30	19.5	0.008
	R1/4	3113 08 13	14	13.5	28.5	19.5	0.015
	R3/8	3113 08 17	17	13.5	28.5	19.5	0.020
10	R1/4	3113 10 13	15	16	33.5	23	0.014
	R3/8	3113 10 17	17	16	33.5	23	0.019
	R1/2	3113 10 21	21	16	34	23	0.100
12	R1/4	3113 12 13	15	19	39	26	0.016
	R3/8	3113 12 17	17	19	39	26	0.022
	R1/2	3113 12 21	21	19	39	26	0.040

Pre-coated thread
The body swivels for positioning purposes.
This model prevents distortion of the tube.

3133

45° Elbow, Male BSPP and Metric Thread

ØD	C		E	F	G	H	L	kg
4	M5x0.8	3133 04 19	3.5	8	9	23	13	0.003
	G1/8	3133 04 10	4.5	13	9	20.5	13	0.006
6	M5x0.8	3133 06 19	3.5	8	11	28	14.5	0.003
	G1/8	3133 06 10	4.5	13	11	24	14.5	0.006
	G1/4	3133 06 13	5.5	16	11	24	14.5	0.011
8	G1/8	3133 08 10	4.5	13	13.5	31	19.5	0.011
	G1/4	3133 08 13	5.5	16	13.5	29	19.5	0.012
	G3/8	3133 08 17	5.5	20	13.5	29	19.5	0.020
10	G1/4	3133 10 13	5.5	16	16	35	23	0.014
	G3/8	3133 10 17	5.5	20	16	33.5	23	0.017
	G1/2	3133 10 21	7	24	16	33.5	23	0.026
12	G1/4	3133 12 13	5.5	16	19	40.5	26	0.016
	G3/8	3133 12 17	5.5	20	19	39	26	0.019
	G1/2	3133 12 21	7	24	19	39	26	0.028

The body swivels for positioning purposes.
This model prevents distortion of the tube.

Stud Fittings

3108

Stud Branch Tee, Male BSPT Thread

		Technical polymer, nickel-plated brass, NBR		ØD	C		F	G	H	L/2	kg
4	R1/8	3108 04 10					10	8.5	15.5	14	0.006
	R1/4	3108 04 13					14	8.5	16	14	0.015
6	R1/8	3108 06 10					10	10.5	17.5	16	0.007
	R1/4	3108 06 13					14	10.5	18	16	0.016
8	R1/8	3108 08 10					10	13.5	22	23	0.009
	R1/4	3108 08 13					14	13.5	21	23	0.016
10	R3/8	3108 10 13					17	13.5	21	23	0.020
	R1/2	3108 10 17					21	16	24	26.5	0.022
12	R1/4	3108 12 13					15	19	27	31	0.021
	R3/8	3108 12 17					17	19	27	31	0.026
14	R1/2	3108 12 21					21	19	27	31	0.037
	R3/8	3108 14 17					20	22	30.5	35	0.038
16	R1/2	3108 14 21					24	22	28.5	35	0.048
	R3/8	3108 16 17					27	27	53	38.5	0.128
	R1/2	3108 16 21					27	27	53	38.5	0.124

Pre-coated thread
The body swivels for positioning purposes.

3198

Stud Branch Tee, Male BSPP and Metric Thread

		Technical polymer, nickel-plated brass, NBR		ØD	C		E	F	G	H	L/2	kg
4	M5x0.8	3198 04 19					3.5	8	8.5	17.5	14	0.003
	G1/8	3198 04 10					5	13	8.5	15	14	0.006
6	G1/4	3198 04 13					5.5	16	8.5	15	14	0.011
	M5x0.8	3198 06 19					3.5	8	10.5	19.5	16	0.004
8	G1/8	3198 06 10					5	13	10.5	17	16	0.007
	G1/4	3198 06 13					5.5	16	10.5	17	16	0.012
10	G1/8	3198 08 10					4.5	13	13.5	23.5	23	0.011
	G1/4	3198 08 13					5.5	16	13.5	21.5	23	0.014
12	G3/8	3198 08 17					5.5	20	13.5	21.5	23	0.019
	G1/4	3198 10 13					5.5	16	16	26	26.5	0.017
14	G3/8	3198 10 17					5.5	20	16	24	26.5	0.020
	G1/2	3198 10 21					7.5	24	16	24	26.5	0.029
16	G1/4	3198 12 13					5.5	16	19	29	31	0.021
	G3/8	3198 12 17					5.5	20	19	27	31	0.024
	G1/2	3198 12 21					7	24	19	27	31	0.033
	G3/8	3198 14 17					5.5	20	22	32.5	35.5	0.036
	G1/2	3198 14 21					7	24	22	27	35.5	0.036
	G3/8	3198 16 17					7.5	27	27	54.5	38.5	0.121
	G1/2	3198 16 21					9	27	27	54.5	38.5	0.117

The body swivels for positioning purposes.

3103

Stud Run Tee, BSPT Thread

		Technical polymer, nickel-plated brass, NBR		ØD	C		F	G	H	H1	L	kg
4	R1/8	3103 04 10					10	8.5	23.5	9	14.5	0.006
	R1/4	3103 04 13					14	8.5	24	9.5	14.5	0.015
6	R1/8	3103 06 10					10	10.5	27.5	10	17.5	0.007
	R1/4	3103 06 13					14	10.5	28	10.5	17.5	0.016
8	R1/8	3103 08 10					10	13.5	35	12	23	0.009
	R1/4	3103 08 13					14	13.5	34	11	23	0.015
10	R3/8	3103 08 17					17	13.5	34	11	23	0.020
	R1/4	3103 10 13					15	16	40.5	14	26.5	0.017
12	R3/8	3103 10 17					17	16	40.5	14	26.5	0.022
	R1/2	3103 10 21					21	16	40.5	14	26.5	0.033
14	R1/4	3103 12 13					15	19	46.5	15.5	31	0.028
	R3/8	3103 12 17					17	19	46.5	15.5	31	0.026
	R1/2	3103 12 21					21	19	46.5	15.5	31	0.037
	R3/8	3103 14 17					20	22	55	19.5	35.5	0.037
16	R1/2	3103 14 21					24	22	52.5	17.5	35.5	0.048
	R3/8	3103 16 17					27	27	78	27	38.5	0.126
	R1/2	3103 16 21					27	27	78	27	38.5	0.124


Pre-coated thread
The body swivels for positioning purposes.

Stud Fittings

3193 Stud Run Tee, Male BSPP and Metric Thread



Technical polymer, nickel-plated
brass, NBR



ØD	C		E	F	G	H	H1	L	kg
4	M5x0.8	3193 04 19	3.5	8	8.5	26	11.5	14.5	0.003
	G1/8	3193 04 10	5	13	8.5	23	8.5	14.5	0.006
	G1/4	3193 04 13	5.5	16	8.5	23	8.5	14.5	0.011
6	M5x0.8	3193 06 19	3.5	8	10.5	29.5	12.5	17.5	0.004
	G1/8	3193 06 10	5	13	10.5	27	10	17.5	0.007
	G1/4	3193 06 13	5.5	16	10.5	27	10	17.5	0.012
8	G1/8	3193 08 10	4.5	13	13.5	36.5	14	23	0.011
	G1/4	3193 08 13	5.5	16	13.5	34.5	12	23	0.014
	G3/8	3193 08 17	5.5	20	13.5	34.5	12	23	0.019
10	G1/4	3193 10 13	5.5	16	16	42	15.5	26.5	0.017
	G3/8	3193 10 17	5.5	20	16	40.5	14	26.5	0.020
	G1/2	3193 10 21	7.5	24	16	40.5	14	26.5	0.029
12	G1/4	3193 12 13	5.5	16	19	48	17	31	0.021
	G3/8	3193 12 17	5.5	20	19	46.5	15.5	31	0.024
	G1/2	3193 12 21	7	24	19	46.5	15.5	31	0.038
14	G3/8	3193 14 17	5.5	20	22	56.5	21.5	35.5	0.107
	G1/2	3193 14 21	7	24	22	51	16	35.5	0.120
16	G3/8	3193 16 17	7.5	27	27	79.5	41	38.5	0.121
	G1/2	3193 16 21	9	27	27	79.5	41	38.5	0.117

The body swivels for positioning purposes.

3148 Y Piece, Male BSPT Thread

Technical polymer, nickel-plated brass, NBR

ØD	C		F	H	K	L	N	kg
4	R1/8	3148 04 10	10	32.5	8.5	17.5	9	0.010
	R1/4	3148 04 13	14	33	8.5	17.5	9	0.019
6	R1/8	3148 06 10	10	39.5	10.5	21.5	11	0.011
	R1/4	3148 06 13	14	40	10.5	21.5	11	0.021
8	R1/8	3148 08 10	13	56.5	13.5	28	14.5	0.020
	R1/4	3148 08 13	14	55.5	13.5	28	14.5	0.025
10	R3/8	3148 08 17	16	48.5	13.5	28	14.5	0.034
	R1/4	3148 10 13	14	60	19	39	20	0.033
	R3/8	3148 10 17	16	60.5	19	39	20	0.042
12	R1/2	3148 10 21	24	61	19	39	20	0.062
	R3/8	3148 12 17	19	66	19	39	20	0.054
	R1/2	3148 12 21	21	66	19	39	20	0.059

Pre-coated thread
The body swivels for positioning purposes.

3158 Y Piece, Male BSPP and Metric Thread

Technical polymer, nickel-plated
brass, NBR

ØD	C		E	F	H	K	L	N	kg
4	M5x0.8	3158 04 19	3.5	8	32.5	8.5	17.5	9	0.006
	G1/8	3158 04 10	5	13	32	8.5	17.5	9	0.009
	G1/4	3158 04 13	5.5	16	32.5	8.5	17.5	9	0.014
6	M5x0.8	3158 06 19	3.5	10	39.5	10.5	21.5	11	0.009
	G1/8	3158 06 10	5	13	39	10.5	21.5	11	0.012
	G1/4	3158 06 13	5.5	16	39.5	10.5	21.5	11	0.017
8	G1/8	3158 08 10	5	13	49	13.5	28	14.5	0.020
	G1/4	3158 08 13	5.5	16	49.5	13.5	28	14.5	0.023
	G3/8	3158 08 17	6	19	48	13.5	28	14.5	0.030
10	G1/4	3158 10 13	5.5	16	58	16	33	17	0.031
	G3/8	3158 10 17	6	20	57.5	16	33	17	0.039
	G1/2	3158 10 21	7	24	58	16	33	17	0.053
12	G3/8	3158 12 17	6	20	62	19	39	20	0.044
	G1/2	3158 12 21	7	24	63	19	39	20	0.049

The body swivels for positioning purposes.


Tube-to-Tube Fittings

3106

Equal and Unequal Tube-to-Tube Connector



Technical polymer, NBR






ØD	ØD1		G	L	kg
3	3	3106 03 00	8.5	25	0.002
	4	3106 03 04	8.5	25	0.002
4	1/4	3106 04 56	11	29.5	0.010
	4	3106 04 00	8.5	25	0.001
	6	3106 04 06	11	28	0.002
	8	3106 04 08	13.5	38	0.005
6	1/4	3106 06 56	13.5	36	0.009
	6	3106 06 00	10.5	28.5	0.002
	8	3106 06 08	13.5	38	0.005
	10	3106 06 10	16	42	0.007
8	8	3106 08 00	13.5	38	0.004
	10	3106 08 10	16	42	0.008
	12	3106 08 12	19	50.5	0.026
10	10	3106 10 00	16	42	0.006
	12	3106 10 12	19	50.5	0.022
	1/2	3106 12 62	22	56.5	0.024
12	12	3106 12 00	19	50.5	0.009
	14	3106 12 14	22	56	0.026
	16	3106 12 16	27	61	0.066
14	14	3106 14 00	22	56	0.014
16	16	3106 16 00	27	60.5	0.041

3106

Equal and Unequal Tube-to-Tube Connector







Inch

	Technical polymer, NBR	ØD	ØD1		G	L	kg
		1/4	1/4	3106 56 00	10.9	29.5	0.002
			3/8	3106 60 00	16	42	0.006
		3/8	10	3106 60 10	12	50.5	0.029
			1/4	3106 60 56	16	41	0.016
		1/2	1/2	3106 62 00	22	55	0.015

5/32" (4 mm) and 5/16" (8 mm) also available

3102



Equal and Unequal Elbow

	Technical polymer, NBR	ØD	ØD1		G	L	kg
		4	4	3102 04 00	8.5	19	0.001
			6	3102 04 06	10.5	22.5	0.004
		6	6	3102 06 00	10.5	22.5	0.002
			8	3102 06 08	13.5	29.5	0.009
		8	8	3102 08 00	13.5	29.5	0.004
			10	3102 08 10	16	34.5	0.031
		10	10	3102 10 00	16	34.5	0.006
			12	3102 10 12	19	40.5	0.022
		12	12	3102 12 00	19	40.5	0.010
			14	3102 14 00	22	46.5	0.015
		16	16	3102 16 00	27	52	0.043

3102

Equal Elbow

Inch

	Technical polymer, NBR	ØD	ØD1		G	L	kg
		1/4	1/4	3102 56 00	11	23.5	0.002
			3/8	3102 60 00	16	34	0.006
		1/2	1/2	3102 62 00	22	35	0.018

5/32" (4 mm) and 5/16" (8 mm) also available


Tube-to-Tube Fittings

3104

Equal and Unequal Tee



Technical polymer, NBR



ØD	ØD1		G	H	L/2	kg
3	3	3104 03 00	8.5	19	14.5	0.004
4	4	3104 04 00	8.5	19	14.5	0.002
	6	3104 04 06	10.5	22.5	17.5	0.007
6	4	3104 06 04	10.5	22.5	17.5	0.005
	6	3104 06 00	10.5	22.5	17.5	0.003
8	8	3104 06 08	13.5	29.5	23	0.015
	4	3104 08 04	13.5	29	22.5	0.114
8	6	3104 08 06	13.5	29.5	23	0.010
	8	3104 08 00	13.5	29.5	23	0.006
10	10	3104 08 10	16	34.5	26.5	0.021
	4	3104 10 04	16	39	31	0.027
10	8	3104 10 08	16	34.5	26.5	0.014
	10	3104 10 00	16	34.5	26.5	0.009
12	12	3104 10 12	19	40.5	31	0.036
	4	3104 12 04	19	39	31	0.034
12	10	3104 12 10	19	40.5	31	0.024
	12	3104 12 00	19	40.5	31	0.014
14	8	3104 14 08	22	46	35.5	0.054
	14	3104 14 00	22	46	35.5	0.023
16	12	3104 16 12	27	52.5	39	0.088
	16	3104 16 00	27	52	39	0.063


3104

Equal and Unequal Tee

Inch



Technical polymer, NBR



ØD	ØD1		G	H	L/2	kg
5/32	1/4	3104 04 56	11	23.5	18	0.014
1/8	1/8	3104 53 00	8.4	19	14.5	0.003
	1/4	3104 53 56	11	23.5	18	0.011
3/16	3/16	3104 55 00	10.9	27.2	21.6	0.015
1/4	5/32	3104 56 04	11	23.5	18.5	0.014
	1/4	3104 56 00	11	23	24	0.003
1/4	1/8	3104 56 53	11	23.5	18.5	0.007
	3/8	3104 56 60	16	33.5	24.5	0.017
3/8	1/4	3104 60 56	16	32.5	25.5	0.019
	1/2	3104 60 62	22	46	35	0.070
3/8	3/8	3104 60 00	16	34	26	0.009
	1/2	3104 62 00	22	46	35	0.026
1/2	1/4	3104 62 56	22.1	45.2	35.3	0.021
	3/8	3104 62 60	22	46	35	0.060


5/32" (4 mm) and 5/16" (8 mm) also available

3140

Equal and Unequal Single Y Piece



Technical polymer, NBR



ØD	ØD1		H	K	L	N	kg
4	4	3140 04 00	17.5	8.5	28.5	9	0.002
	6	3140 04 06	17.5	10.5	33	9	0.003
6	6	3140 06 00	21.5	10.5	35	11	0.003
	8	3140 06 08	22.5	13.5	41	11.5	0.005
8	8	3140 08 00	28	13.5	45	14.5	0.007
	10	3140 08 10	28	16	47	14.5	0.011
10	10	3140 10 00	33	16	53	17	0.010
	12	3140 10 12	33	19	57	17	0.018
12	12	3140 12 00	39	19	57	17	0.028

Tube-to-Tube Fittings

LF 3000®


Push-In Fittings

3107

Equal and Unequal Cross



Technical polymer, NBR



ØD	ØD1	ØD2		G	H	N	ØT	kg
4	4	4	3107 04 00	11	36	20	4.2	0.013
6	4	6	3107 04 06	11	36	20	4.2	0.010
4	4	6	3107 06 04	11	36	20	4.2	0.011
6	6	6	3107 06 00	11	36	20	4.2	0.005
8	6	8	3107 06 08	11	46	22.5	4.2	0.018
6	6	8	3107 08 06	13.5	46	22.5	4.2	0.023
8	8	8	3107 08 00	13.5	46	22.5	4.2	0.020

Boxes protect the contents and are designed to meet your requirements:

- part numbers and corresponding product pictures allow for immediate visual identification
- bar codes
- easy storage
- tamper-proof system of opening/closing
- recyclable material



Bulkhead Connector Fittings

3116 Equal Bulkhead Connector

	Technical polymer, NBR									
	ØD		F	K _{max}	L1	L2	ØT _{min}	kg		
	4	3116 04 00	13	5.5	15	10	10.5	0.003		
	6	3116 06 00	15	8.5	18	10.5	12.5	0.004		
	8	3116 08 00	18	14.5	25	13.5	15.5	0.007		
	10	3116 10 00	22	14.5	27.5	15.5	18.5	0.015		
	12	3116 12 00	26	18.5	33	18	22.5	0.019		
	14	3116 14 00	29	20.5	37.5	20.5	25.5	0.028		

3146 Equal Mixed Bulkhead Connector

	Nickel-plated brass, NBR									
	ØD		F1	F2	F3	K _{max}	L1	L2	ØT _{min}	kg
	4	3146 04 00	13	13	10	7	17.5	17.5	10.5	0.018
	6	3146 06 00	15	17	13	8	19	18	12.5	0.029
	8	3146 08 00	18	19	14	8	20.5	20.5	15.5	0.036
	10	3146 10 00	22	22	19	8.5	23	24.5	18.5	0.065
	12	3146 12 00	26	25	22	8.5	27	25	22.5	0.096
	14	3146 14 00	29	29	24	10.5	27	27	25.5	0.125

Push-in connection with compression fitting

3136 Bulkhead Connector, Female BSPP Thread

Nickel-plated brass, NBR

ØD	C		E	F1	F2	K _{max}	L1	L2	ØT _{min}	kg
4	G1/8	3136 04 10	9.5	13	13	7	17	11.5	10.5	0.015
	G1/4	3136 04 13	13.5	13	16	7	17	15.5	10.5	0.021
6	G1/8	3136 06 10	9.5	15	15	8	19	10.5	12.5	0.020
	G1/4	3136 06 13	13.5	15	17	7	19	15.5	12.5	0.027
8	G3/8	3136 06 17	12	15	22	8	19	16	12.5	0.041
	G1/8	3136 08 10	9.5	18	17	8	20.5	10.5	15.5	0.029
10	G1/4	3136 08 13	13.5	18	17	8	20.5	14.5	15.5	0.029
	G3/8	3136 10 17	14	22	22	8.5	23	16	18.5	0.051
12	G3/8	3136 12 17	14	26	24	8.5	27	16	22.5	0.078
	G1/2	3136 12 21	19.5	26	27	8.5	27	21.5	22.5	0.097
16	G3/8	3136 16 17	12	29	29	10.5	30	15	27.5	0.125
	G1/2	3136 16 21	15	29	29	10.5	30	19.5	27.5	0.126

3139 Equal Bulkhead Elbow

Technical polymer, nickel-plated brass, NBR

ØD		F	G	H	K _{max}	L	ØT _{min}	kg
4	3139 04 00	13	8.5	17	6.5	14.5	10.5	0.014
6	3139 06 00	15	10.5	19.5	7	17.5	12.5	0.021
8	3139 08 00	18	13.5	24	8	23	15.5	0.032
10	3139 10 00	22	16	28	8.5	26	18.5	0.050
12	3139 12 00	26	19	33	8.5	31	22.5	0.086
14	3139 14 00	29	25.5	37.5	10.5	36	25.5	0.116


The body swivels for positioning purposes.

Multiple Fittings


LF 3000®

Push-In Fittings


3144 Equal and Unequal Multiple Y Piece

	Technical polymer, NBR		ØD	ØD1		K	K1	L	N	N1	ØT	kg
			4	4	3144 04 04	25.5	21	30.5	10	8.5	3.7	0.015
				6	3144 04 06	26	21	30.5	10	10	3.7	0.013
			6	6	3144 06 06	31.5	26.5	37.5	12	8.5	3.7	0.034
				8	3144 06 08	31.5	26.5	38	12	10	3.7	0.026


3304 Multiple Tee

	Technical polymer, NBR		ØD1	ØD2		H	L	L/2	N	ØT	kg
			6	4	3304 06 04	24.5	34	37	11.5	4.2	0.015
			8	4	3304 08 04	24.5	34	37	11.5	4.2	0.012
				6	3304 08 06	24.5	34	37	11.5	4.2	0.010
			10	6	3304 10 06	36	44	40.5	14.5	4.2	0.019
				8	3304 10 08	36	44	40.5	15.5	4.2	0.015

3306 90° Multiple Elbow

	Technical polymer, NBR		ØD1	ØD2		G	G1	H	L/2	N	N1	ØT	kg
			6	4	3306 06 04	13.5	11	18.5	36	43	11.5	4.2	0.034
			8	4	3306 08 04	13.5	11	18.5	36.5	43	11.5	4.2	0.025
				6	3306 08 06	13.5	11	18.5	36.5	43	11.5	4.2	0.022
			10	6	3306 10 06	16	13.5	23	42	52	14.5	4.2	0.048
				8	3306 10 08	16	13.5	23.5	42	52	14.5	4.2	0.036


3310 In-Line Manifold

	Treated aluminium, NBR		ØD	C		Number of Outlets	E	H	L	L1	N	kg
			4	G1/4	3310 04 13	8	10	33	114	104	11.5	0.175
			6	G1/4	3310 06 13	8	10	33	114	104	12.5	0.170
			8	G3/8	3310 08 17	6	12	33	114	104	15	0.157
			10	G1/2	3310 10 21	6	16	48	145.5	135.5	17	0.348
			12	G1/2	3310 12 21	6	16	45	158	148	20.5	0.370

Plug-In Fittings and Accessories

3182

Equal and Unequal Plug-In Elbow

	Technical polymer, NBR			G	H	H1	H2	L	kg
	ØD1	ØD2							
	4	4	3182 04 00	8.5	23	6	15.5	14	0.001
		6	3182 04 06	10.5	26.5	7	17	16	0.003
	6	4	3182 06 04	10.5	24.5	7	15.5	16	0.001
		6	3182 06 00	10.5	26.5	7	17	16	0.001
	8	8	3182 08 00	13.5	33.5	8	21.5	23	0.007
		8	3182 08 00	13.5	33.5	8	21.5	23	0.003
	10	10	3182 10 00	16	39	10	24.5	26.5	0.010
		12	3182 10 12	19	44.5	10.5	27.5	31	0.017
	12	12	3182 12 00	19	45.5	10.5	27.5	31	0.007

3182

Equal Plug-In Elbow


Inch

	Technical polymer, NBR			G	H	H1	H2	L	kg
	ØD1	ØD2							
	1/4	1/4	3182 56 00	11	27.5	7.5	18	18.5	0.002
		3/8	3182 60 00	16	38.5	9	24	26	0.010
	1/2	1/2	3182 62 00	22	51	13	28	35	0.030

5/32" (4 mm) and 5/16" (8 mm) also available


3184

Extended Equal and Unequal Plug-In Elbow

	Technical polymer, NBR			G	H	H1	H2	L	kg
	ØD1	ØD2							
	4	4	3184 04 00	8.5	32.5	15.5	25	14	0.004
		6	3184 04 06	10.5	38.5	19	29	16	0.004
	6	6	3184 06 00	10.5	38.5	19	29	16	0.002
		8	3184 06 08	13.5	49	23.5	37	23	0.010
	8	8	3184 08 00	13.5	49	23.5	37	23	0.003
		10	3184 08 10	16	56	26.5	41.5	26.5	0.013
	10	10	3184 10 00	16	56	26.5	41.5	26.5	0.010
		12	3184 10 12	19	62.5	28	45.5	31	0.020
	12	12	3184 12 00	19	62.5	28	45.5	31	0.014


3180

45° Plug-In Equal Elbow


	Technical polymer, NBR			G	H	H1	H2	L	kg
	ØD1	ØD2							
	4	4	3180 04 00	9	33.5	19	21	13	0.001
		6	3180 06 00	11	39	21	25	14.5	0.003
	8	8	3180 08 00	13.5	44	21.5	25.5	19.5	0.005
		10	3180 10 00	16	53	27	32.5	23	0.004
	12	12	3180 12 00	19	58.5	27.5	34	26.5	0.007

Plug-In Fittings and Accessories


3183 Equal and Unequal Plug-In Run Tee

	Technical polymer, NBR	ØD1	ØD2		G	H	H1	H2	L	kg
		4	4	3183 04 00	8.5	33	6	15.5	14.5	0.002
			6	3183 04 06	10.5	38.5	7	17	17.5	0.006
		6	6	3183 06 00	10.5	38.5	7	17	17	0.002
			8	3183 06 08	13.5	48.5	8	21.5	23	0.014
		8	8	3183 08 00	13.5	49	8	21.5	23	0.004
			10	3183 08 10	16	56.5	10.5	24.5	26.5	0.018
		10	10	3183 10 00	16	57	10.5	24.5	26.5	0.007
			12	3183 10 12	19	65.5	10.5	27.5	31	0.034
		12	12	3183 12 00	19	65.5	10.5	27.5	31	0.011


3188 Equal and Unequal Plug-In Branch Tee

	Technical polymer, NBR	ØD1	ØD2		G	H	H1	H2	L/2	kg
		4	4	3188 04 00	8.5	25	8	15.5	14.5	0.002
			6	3188 04 06	10.5	28.5	9	17	16	0.007
		6	6	3188 06 00	10.5	28.5	9	17	16	0.002
			8	3188 06 08	13.5	36.5	11	21.5	22	0.014
		8	8	3188 08 00	13.5	36.5	11	21.5	23	0.005
			10	3188 08 10	16	41	12.5	24.5	26.5	0.018
		10	10	3188 10 00	16	41	12.5	24.5	26.5	0.007
			12	3188 10 12	19	46.5	12.5	27.5	31	0.034
		12	12	3188 12 00	19	46.5	12.5	27.5	31	0.020

3142 Equal and Unequal Plug-In Single Y Piece

	Technical polymer, NBR	ØD1	ØD2		L	L1	L2	N	kg
		4	4	3142 04 00	34	21.5	17.5	9	0.002
			6	3142 04 06	35.5	21.5	17.5	9	0.004
		6	6	3142 06 00	39.5	25.5	21.5	11	0.004
			8	3142 06 08	44	25.5	21.5	11	0.015
		8	8	3142 08 00	50.5	32	28	14.5	0.007
			10	3142 08 10	53.5	32	28	14.5	0.024
		10	10	3142 10 00	57.5	36	33	17	0.010
			12	3142 10 12	60	35	33	17	0.037
		12	12	3142 12 00	66	41	39	20	0.017

3143 Multiple Plug-In Y Piece

	Technical polymer, nickel-plated brass, NBR	ØD1	ØD2		K	K1	L	L1	N	N1	kg
		4	6	3143 04 06	26	21.5	49.5	35.5	11	8.5	0.012
			8	3143 04 08	26	21.5	51	32	11	8.5	0.021
		6	8	3143 06 08	31.5	26.5	57.5	39	12	10	0.035


Plug-In Fittings and Accessories

3120

Stem Connector



Technical polymer



ØD



L

L1

kg

4	3120 04 00	34.5	12	0.001
6	3120 06 00	38.5	14	0.001
8	3120 08 00	41	18.5	0.001
10	3120 10 00	51.5	20.5	0.002
12	3120 12 00	60	24.5	0.004
14	3120 14 00	69.5	25.5	0.007


This model is available in nickel-plated brass; please use suffix 85. Example: 3120 04 00 85.
Only compatible with Parker Legris fittings.
Drawing available upon request.

3166

Plug-In Reducer



Technical polymer, NBR



ØD1

ØD2



G

L

L1

kg

3	4	3166 03 04	8.5	37.5	23.5	0.002
	6	3166 04 06	8.5	37.5	23.5	0.001
4	8	3166 04 08	8.5	37.5	19	0.001
	10	3166 04 10	12	44	22.5	0.003
	8	3166 06 08	10.5	37.5	20	0.001
	10	3166 06 10	10.5	38	17.5	0.002
6	12	3166 06 12	14.5	46	23	0.005
	14	3166 06 14	14.5	48	23	0.006
	10	3166 08 10	13.5	49	28.5	0.003
8	12	3166 08 12	13.5	49	24.5	0.004
	14	3166 08 14	17	48	23	0.007
	12	3166 10 12	21.5	56.5	33.5	0.006
10	14	3166 10 14	21.5	58.5	33.5	0.007
12	14	3166 12 14	23.5	58.5	33.5	0.010


3166

Plug-In Reducer

Inch



Technical polymer, NBR



ØD1

ØD2



G

L

L1

kg


1/4	5/16	3166 56 08	11	41	23	0.002
	3/8	3166 56 60	11	41	21	0.002

3168

Plug-In Increaser



Technical polymer, NBR



ØD1

ØD2



G

L

L1

kg

6	4	3168 06 04	10.5	35	23	0.001
	6	3168 08 06	13.5	45	31.5	0.003
8	1/4	3168 08 56	16	40	25.5	0.008
10	8	3168 10 08	16	42.5	21	0.009
12	10	3168 12 10	19	49	24.5	0.012


3168

Plug-In Increaser

Inch



Technical polymer, NBR



ØD1

ØD2



G

L

L1

kg

1/4	5/32	3168 56 04	11	41	29	0.001
	3/16	3168 56 55	20.5	41	25	0.003

Plug-In Fittings and Accessories


LF 3000®

Push-In Fittings

3126 Blanking Plug



Technical polymer




ØD		G	L	L1	kg
3	3126 03 00	6	25	13.5	0.001
4	3126 04 00	4	30	15.5	0.001
6	3126 06 00	8	33	16.5	0.001
8	3126 08 00	10	35	17.5	0.001
10	3126 10 00	12	42	21	0.002
12	3126 12 00	14	45	22	0.003
14	3126 14 00	16	49	23.5	0.005
16	3126 16 00*	19	57	30	0.063


*Nickel-plated brass

3126 Blanking Plug


Inch

	Technical polymer 	ØD		G	L	L1	kg
		1/4	3126 56 00	8	36.5	22	0.001
		3/8	3126 60 00	12	42	22	0.002
		1/2	3126 62 00	15	48.5	21.5	0.003
		5/32" (4 mm) and 5/16" (8 mm) also available					

3122 Plug-In Barb Connector

	Technical polymer 	ØD1	ØD2		ØD3	L	L1	L2	kg
		4	3.2	3122 04 53	5	37	25	17	0.004
			5	3122 04 05	7	37	25	17	0.005
		6	5	3122 06 05	7	39	25	17	0.001
		8	6.3	3122 08 56	8.5	39.5	21	17	0.001
			8	3122 08 08	10	44.5	26	22	0.001
		10	6.3	3122 10 56	8	45	24.5	17	0.002
			8	3122 10 08	10	50	29.5	22	0.002
			8	3122 12 08	10	50	26	22	0.002
		12	10	3122 12 10	12	48.5	25.5	22.5	0.002
			12.5	3122 12 62	14.5	57	34	22.5	0.004
		14	12.5	3122 14 62	14.5	59.5	34.5	22.5	0.022

3151 End Cap

	Technical polymer, NBR 	ØD		G	H	kg
		4	3151 04 00	8.5	14.7	0.001
		6	3151 06 00	10.5	16.9	0.001
		8	3151 08 00	13.5	21.9	0.002
		10	3151 10 00	16	22.2	0.003
		12	3151 12 00	19	27.7	0.006
		14	3151 14 00	22	28	0.014

Other products are available upon request; please do not hesitate to consult us.

Banjo Fittings

This range of fittings is ideal when access is only possible from above and **orientation of the tube** is required. This range of modular fittings includes single and multiple configurations, allowing **wide flexibility of design**.

Product Advantages

- Compact**
- Compact design with minimum space between fittings
 - Banjo bolt designed for maximum flow
 - Easy access, even when fittings are close together
 - Easy assembly and automatic sealing:
 - with pre-coating on taper threads
 - with an integral O-ring seal on parallel threads
 - Safe operation: orientation of tube is ensured
 - 100% leak-tested in production
 - Date coding to guarantee quality and traceability

- Modular**
- Effortless stacking of banjo bodies to allow construction of 2 to 6 outlets
 - Orientable (360°) for perfect alignment
 - Modular: tube diameters may be different



Applications

- Robotics
- Automotive Process
- Pneumatics
- Semi-Conductors
- Textile
- Packaging

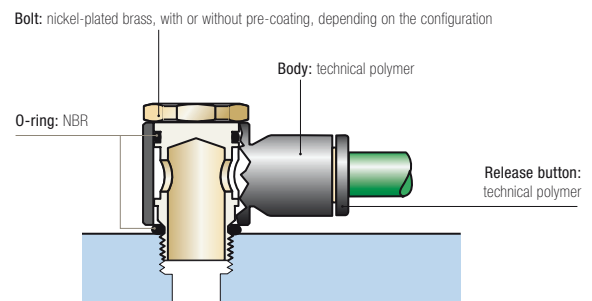
Technical Characteristics

Compatible Fluids	Compressed air Other fluids: please consult us
Working Pressure	Vacuum to 20 bar
Working Temperature	-20°C to +80°C

Tightening Torque (daN.m)	Threads					
	M3 x0.5	M5 x0.8	G1/8	G1/4	G3/8	G1/2
	0.05	0.1	0.4	0.5	0.6	0.7

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.
Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

Component Materials



Silicone-free


Regulations

ISO 14743: Pneumatic fluid power, push-in connectors for thermoplastic tubes
DI: 97/23/EC (PED)

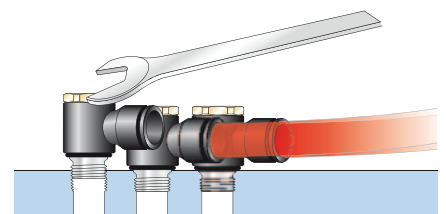
DI: 2002/95/EC (RoHS)
2011/65/EC
DI: 1907/2006 (REACH)

Installation Configurations

Thread and bore diameters for part numbers 3524 - 3527 - 3528 - 3529:



Thread (C)	M5x0.8	G1/8	G1/4	G3/8	G1/2
DN	2.5	5.5	8.5	11	13



Banjo Fittings

3118 Single Banjo, Male BSPP and Metric Thread

ØD	C		E	F	G	H	L1	L2	kg
3	M3x0.5	3118 03 09*	3	-	8.5	13	5	16	0.005
	M5x0.8	3118 03 19*	4	-	8.5	13	5	16	0.005
4	M5x0.8	3118 04 19*	4	-	8.5	13	5	16.5	0.004
	G1/8	3118 04 10	4	13	8.5	17	7	18.5	0.012
6	M5x0.8	3118 06 19*	4	-	10.5	13	7	18.5	0.004
	G1/8	3118 06 10	4	13	10.5	17	7	20	0.013
8	G1/8	3118 08 10	4	13	13.5	16.5	7	25	0.013
	G1/4	3118 08 13	5.5	17	13.5	21	9	27	0.024
10	G3/8	3118 08 17	5.5	20	13.5	24.5	11	29	0.038
	G1/4	3118 10 13	5.5	17	16	21	9.5	29	0.025
12	G3/8	3118 10 17	5.5	20	16	24.5	11	31	0.039
	G1/2	3118 10 21	8	25	19	27.5	13.5	36.5	0.083
12	G3/8	3118 12 17	5.5	20	19	24.5	11	34.5	0.044
	G1/2	3118 12 21	8	25	19	27.5	13.5	36.5	0.074

*With screwdriver slot

3018 Single Banjo, Male BSPT Thread

ØD	C		F	G	H	L	L1	kg
4	R1/8	3018 04 10	13	8.5	18.5	18.5	7	0.015
6	R1/8	3018 06 10	13	10.5	18.5	20	7	0.015
	R1/4	3018 06 13	17	10.5	22.5	22	9.5	0.029
8	R1/8	3018 08 10	13	13.5	18.5	25	7	0.016
	R1/4	3018 08 13	17	13.5	22.5	27	9.5	0.030
10	R3/8	3018 08 17	21	13.5	26.5	29	11	0.047
	R1/4	3018 10 13	17	16	22.5	29	9.5	0.032
12	R3/8	3018 10 17	21	16	26.5	31	11	0.048
	R1/4	3018 12 13	21	19	26.5	34.5	11	0.052
12	R3/8	3018 12 17	21	19	26.5	34.5	11	0.050
	R1/2	3018 12 21	25	19	30	37	13.5	0.086

Pre-coated thread

3124 Single Banjo, Male/Female BSPP and Metric Thread

ØD	C		E	F	G	H	L	L1	kg
4	M5x0.8	3124 04 19	4	8	8.5	19	16	5	0.006
	G1/8	3124 04 10	4	13	8.5	25.5	18.5	7	0.015
6	G1/4	3124 06 13	5.5	17	10.5	33	22	9	0.030
8	G3/8	3124 08 17	5.5	20	13.5	37.5	29	11	0.056

This product family was developed to allow assembly of a function fitting on a cylinder.

3149 Twin Banjo, Male BSPP and Metric Thread

ØD	C		E	F	G	H	L	L1	N	kg
4	M5x0.8	3149 04 19*	4	-	8.5	13	16	4.5	9	0.005
	G1/8	3149 04 10	4	13	10.5	16.5	18.5	7	11.5	0.018
6	G1/8	3149 06 10	4	13	10.5	16.5	18.5	7	11.5	0.014
	G1/4	3149 06 13	5.5	17	13.5	21	27	9.5	14.5	0.035
8	G1/4	3149 08 13	5.5	17	13.5	21	27	9.5	14.5	0.026
	G3/8	3149 08 17	5.5	20	16	24.5	31	11	17	0.053
10	G3/8	3149 10 17	5.5	20	16	24.5	31	11	17	0.042

*With screwdriver slot

3119 Double Banjo, BSPP and Metric Thread

ØD	C		E	F	G	H	L/2	kg
4	M5x0.8	3119 04 19*	4	-	8.5	13	8	0.005
	G1/8	3119 04 10	4	13	11	17	20	0.021
6	G1/8	3119 06 10	4	13	11	17	20	0.024
	G1/4	3119 06 13	5.5	17	13.5	21	26.5	0.031
8	G1/4	3119 08 13	5.5	17	13.5	21	27	0.033
	G3/8	3119 08 17	5.5	20	16	24.5	30.5	0.053
10	G3/8	3119 10 17	5.5	20	16	24.5	31	0.045

*With screwdriver slot


Banjo Fittings

3538

Single Banjo Bodies



Technical polymer, NBR




ØD	C		G	H	L	L1	kg
3	M5x0.8	3538 03 19	8.5	13	16	5	0.003
4	M5x0.8	3538 04 19	8.5	13	16	5	0.001
	G1/8	3538 04 10	10.5	14.5	18.5	7	0.002
	M5x0.8	3538 06 19	11	13	18.5	5	0.001
6	G1/8	3538 06 10	10.5	14.5	20	7	0.002
	G1/4	3538 06 13	13.5	18	22	9.5	0.003
	G1/8	3538 08 10	13.5	14.5	25	7	0.003
8	G1/4	3538 08 13	13.5	18	27	9.5	0.004
	G3/8	3538 08 17	13.5	21.5	29	11.5	0.009
	G1/4	3538 10 13	16	18	29	9.5	0.005
10	G3/8	3538 10 17	16	21.5	31	11.5	0.006
	G1/2	3538 10 21	19	22.5	36.5	13.5	0.019
12	G3/8	3538 12 17	19	21.5	34.5	11.5	0.011
	G1/2	3538 12 21	19	22.5	36.5	13.5	0.015

3539

Double Banjo Bodies



Technical polymer, NBR




ØD	C		G	H	L/2	kg
4	M5x0.8	3539 04 19	8.5	13	16	0.002
	G1/8	3539 04 10	10.5	14.4	20	0.008
6	G1/8	3539 06 10	10.5	14.4	20	0.011
	G1/4	3539 06 13	13.5	18	26	0.014
8	G1/4	3539 08 13	13.5	18	27	0.013
	G3/8	3539 08 17	16	21.5	30.5	0.020
10	G3/8	3539 10 17	16	21.5	31	0.016

3549

Twin Banjo Bodies




Technical polymer, NBR



ØD	C		G	K	L	N	kg
4	M5x0.8	3549 04 19	10	17.5	15.5	9	0.003
	G1/8	3549 04 10	14	22.5	20	12	0.007
	G1/4	3549 04 13	18.5	28	25	14.5	0.019
	G1/8	3549 06 10	14	22.5	20.5	12	0.003
6	G1/4	3549 06 13	18.5	28	25	14.5	0.017
	G3/8	3549 06 17	22.5	33	28.5	17	0.013
	G1/4	3549 08 13	18.5	28	26	14.5	0.010
8	G3/8	3549 08 17	22.5	33	29.5	17	0.020
10	G3/8	3549 10 17	22.5	33	29.5	17	0.016


Modular Banjo Fittings

3527 Single Banjo Bolts, Male BSPP and Metric Thread

	Nickel-plated brass, NBR 	C		F	H	H1	kg
		M5x0.8	3527 00 19*	-	17	7.5	0.003
		G1/8	3527 00 10	13	17	7.5	0.011
		G1/4	3527 00 13	17	21	9.5	0.020
		G3/8	3527 00 17	20	24.5	11	0.033
		G1/2	3527 00 21	25	27.5	11.5	0.063


*With screwdriver slot
Full bore

3528 Stacking Banjo for 2 Body High Modules, Male BSPP and Metric Thread

	Nickel-plated brass, NBR 	C		F	H	H1	H2	kg
		M5x0.8	3528 00 19*	-	24.5	7.5	18.5	0.005
		G1/8	3528 00 10	13	31	7.5	22	0.017
		G1/4	3528 00 13	17	39	9.5	27.5	0.031
		G3/8	3528 00 17	20	46	11	32.5	0.053


*With screwdriver slot
Full bore
Designed for use with 2 banjo bodies

3529 Stacking Banjo for 3 Body High Modules, Male BSPP Thread

	Nickel-plated brass, NBR 	C		F	H	H1	H2	H3	kg
		G1/8	3529 00 10	13	45.5	7.5	22	36	0.023
		G1/4	3529 00 13	17	54	9.5	27.5	45.5	0.042
		G3/8	3529 00 17	20	67.5	11	32.5	54	0.069

Full bore
Designed for use with 3 banjo bodies

3524 Threaded Banjo Bolts, Male/Female BSPP and Metric Thread


	Nickel-plated brass, NBR 	C		F	H	H1	kg
		M5x0.8	3524 00 19	8	17	7.5	0.005
		G1/8	3524 00 10	13	24.5	7.5	0.013
		G1/4	3524 00 13	17	33	9.5	0.027
		G3/8	3524 00 17	20	37.5	11	0.038
		G1/2	3524 00 21	26	42	11.5	0.067

Full bore

Banjo bolts 3527, 3528, 3529 and 3524 are only usable in association with the corresponding bodies for modular construction 3538, 3539 and 3549.

Thread and passage size for part numbers 3527, 3528, 3529 and 3524.

Thread	M5x0.8	G1/8	G1/4	G3/8	G1/2
	2.5	5.5	8.5	11	13



Modular Plug-In Connectors

These connectors allow a **maximum number of tube connections** in a **minimum of space**. Parker Legris offers an **ergonomic solution** to enable quick connection for the most complex installations.

Product Advantages

Panel-Mounted

- Panel mounted to a machine or bulkhead
- Reduced risk of incorrect assembly
- Possible to connect in-line
- Plated metal joiners and clips for reinforcement

In-Line

- Locating pin prevents incorrect assembly
- Cap guides the tubes and protects connections
- Aluminium and technical polymer components
- Bulkhead mountable
- Customised multi-connectors upon request

DIN Rail

- Used alongside electrical connectors
- Pressure indication
- Can be clipped side-by-side into a DIN rail profile [or Ω
- Channels or slots for labels for tube identification



Robotics
Automotive Process
Pneumatics
Semi-Conductors
Textile
Packaging

Applications

Technical Characteristics

Compatible Fluids	Compressed air Other fluids: please consult us
Working Pressure	Vacuum to 10 bar
Working Temperature	-20°C to +80°C

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.
Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

Component Materials

- Multi-connectors:**
- panel-mounted: zinc-plated steel, technical polymer
 - in-line: aluminium, technical polymer
 - DIN rail: technical polymer


Connections: LF 3000®



Silicone-free

Installation Configurations

Panel-Mounted



Standard assembly Customised assembly

A box contains:

- 10 units
- 20 joining clips and 4 end pins
- 4 mounting brackets
- 4 coupling clips
- 1 dismantling tool

The module is constructed from a number of symmetrical components connected by joining clips. A coupling clip locks the module closed. A dismantling tool allows disconnection.

Maximum 5 modules recommended for the mating module; the fixed module is not limited.


In-Line



Regulations

ISO 14743: Pneumatic fluid power, push-in connectors for thermoplastic tubes
DI: 97/23/EC (PED)
DI: 2002/95/EC (RoHS), 2011/65/EC
DI: 1907/2006 (REACH)


DIN Rail Connector



Modular Plug-In Connectors

3300


Modular Plug-In Connector

	Technical polymer, NBR 	ØD		B	H	H1	K	K1	L	L1	L2	N	kg
		4	3300 04 00	21	40.5	29.5	32	20	55	22	6	11	0.078
		6	3300 06 00	28	48	38.5	39	27.5	70	28	7.5	14	0.213
		8	3300 08 00	28	50	39	39	27.5	70	28	7.5	14	0.025

Clearance hole for Ø3 mm screw

3320


Multi-Connector Male Screw Body

	Technical polymer, NBR 	ØD	C	C1		Number of Outlets	G	kg
		4	M38x1.5	M32x1.5	3320 04 00 02	2	42	0.046
			M46x1.5	M40x1.5	3320 04 00 04	4	50	0.070
			M46x1.5	M40x1.5	3320 04 00 07	7	50	0.072
			M65x1.5	M58x1.5	3320 04 00 12	12	70	0.136
		6	M38x1.5	M32x1.5	3320 06 00 02	2	42	0.050
			M46x1.5	M40x1.5	3320 06 00 04	4	50	0.070
			M46x1.5	M40x1.5	3320 06 00 07	7	50	0.070
			M38x1.5	M32x1.5	3320 08 00 02	2	45	0.050

The number of male body outlets must correspond to the same number of outlets on the female body.

3321


Multi-Connector Female Screw Body

	Technical polymer, NBR 	ØD	C	C1		Number of Outlets	G	kg
		4	M38x1.5	M32x1.5	3321 04 00 02	2	45	0.040
			M46x1.5	M40x1.5	3321 04 00 04	4	55	0.065
			M46x1.5	M40x1.5	3321 04 00 07	7	55	0.063
			M65x1.5	M58x1.5	3321 04 00 12	12	75	0.124
		6	M38x1.5	M32x1.5	3321 06 00 02	2	45	0.043
			M46x1.5	M40x1.5	3321 06 00 04	4	55	0.066
			M46x1.5	M40x1.5	3321 06 00 07	7	55	0.064
			M38x1.5	M32x1.5	3321 08 00 02	2	45	0.039

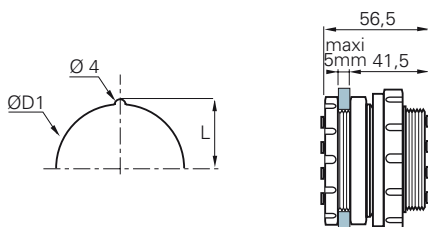
The number of female body outlets must correspond to the same number of outlets on the male body.

3329

Multi-Connector Screw Cap

	Technical polymer 	C		Number of Outlets	G	G1	L	kg
		M32x1.5	3329 00 01	2	32	42	50	0.043
		M40x1.5	3329 00 02	4-7	35	50	55	0.058
		M58x1.5	3329 00 03	12	34	70	70	0.139

Overall Dimensions for Bulkhead Mounting



Number of Outlets	L	ØD1
2	17	32.5
4-7	21	40.5
12	30.3	58.5


Modular Plug-In Connectors

3379

DIN Rail Connector for 2 Tubes



Technical polymer, NBR



ØD



H K L kg

4	3379 04 00	34.5	11	39.5	0.016
6	3379 06 00	34.5	11	39.5	0.026
8	3379 08 00	46	13	44.5	0.034


Start pressure test point on the system

3381

DIN Rail Connector for 3 Tubes



Technical polymer, NBR



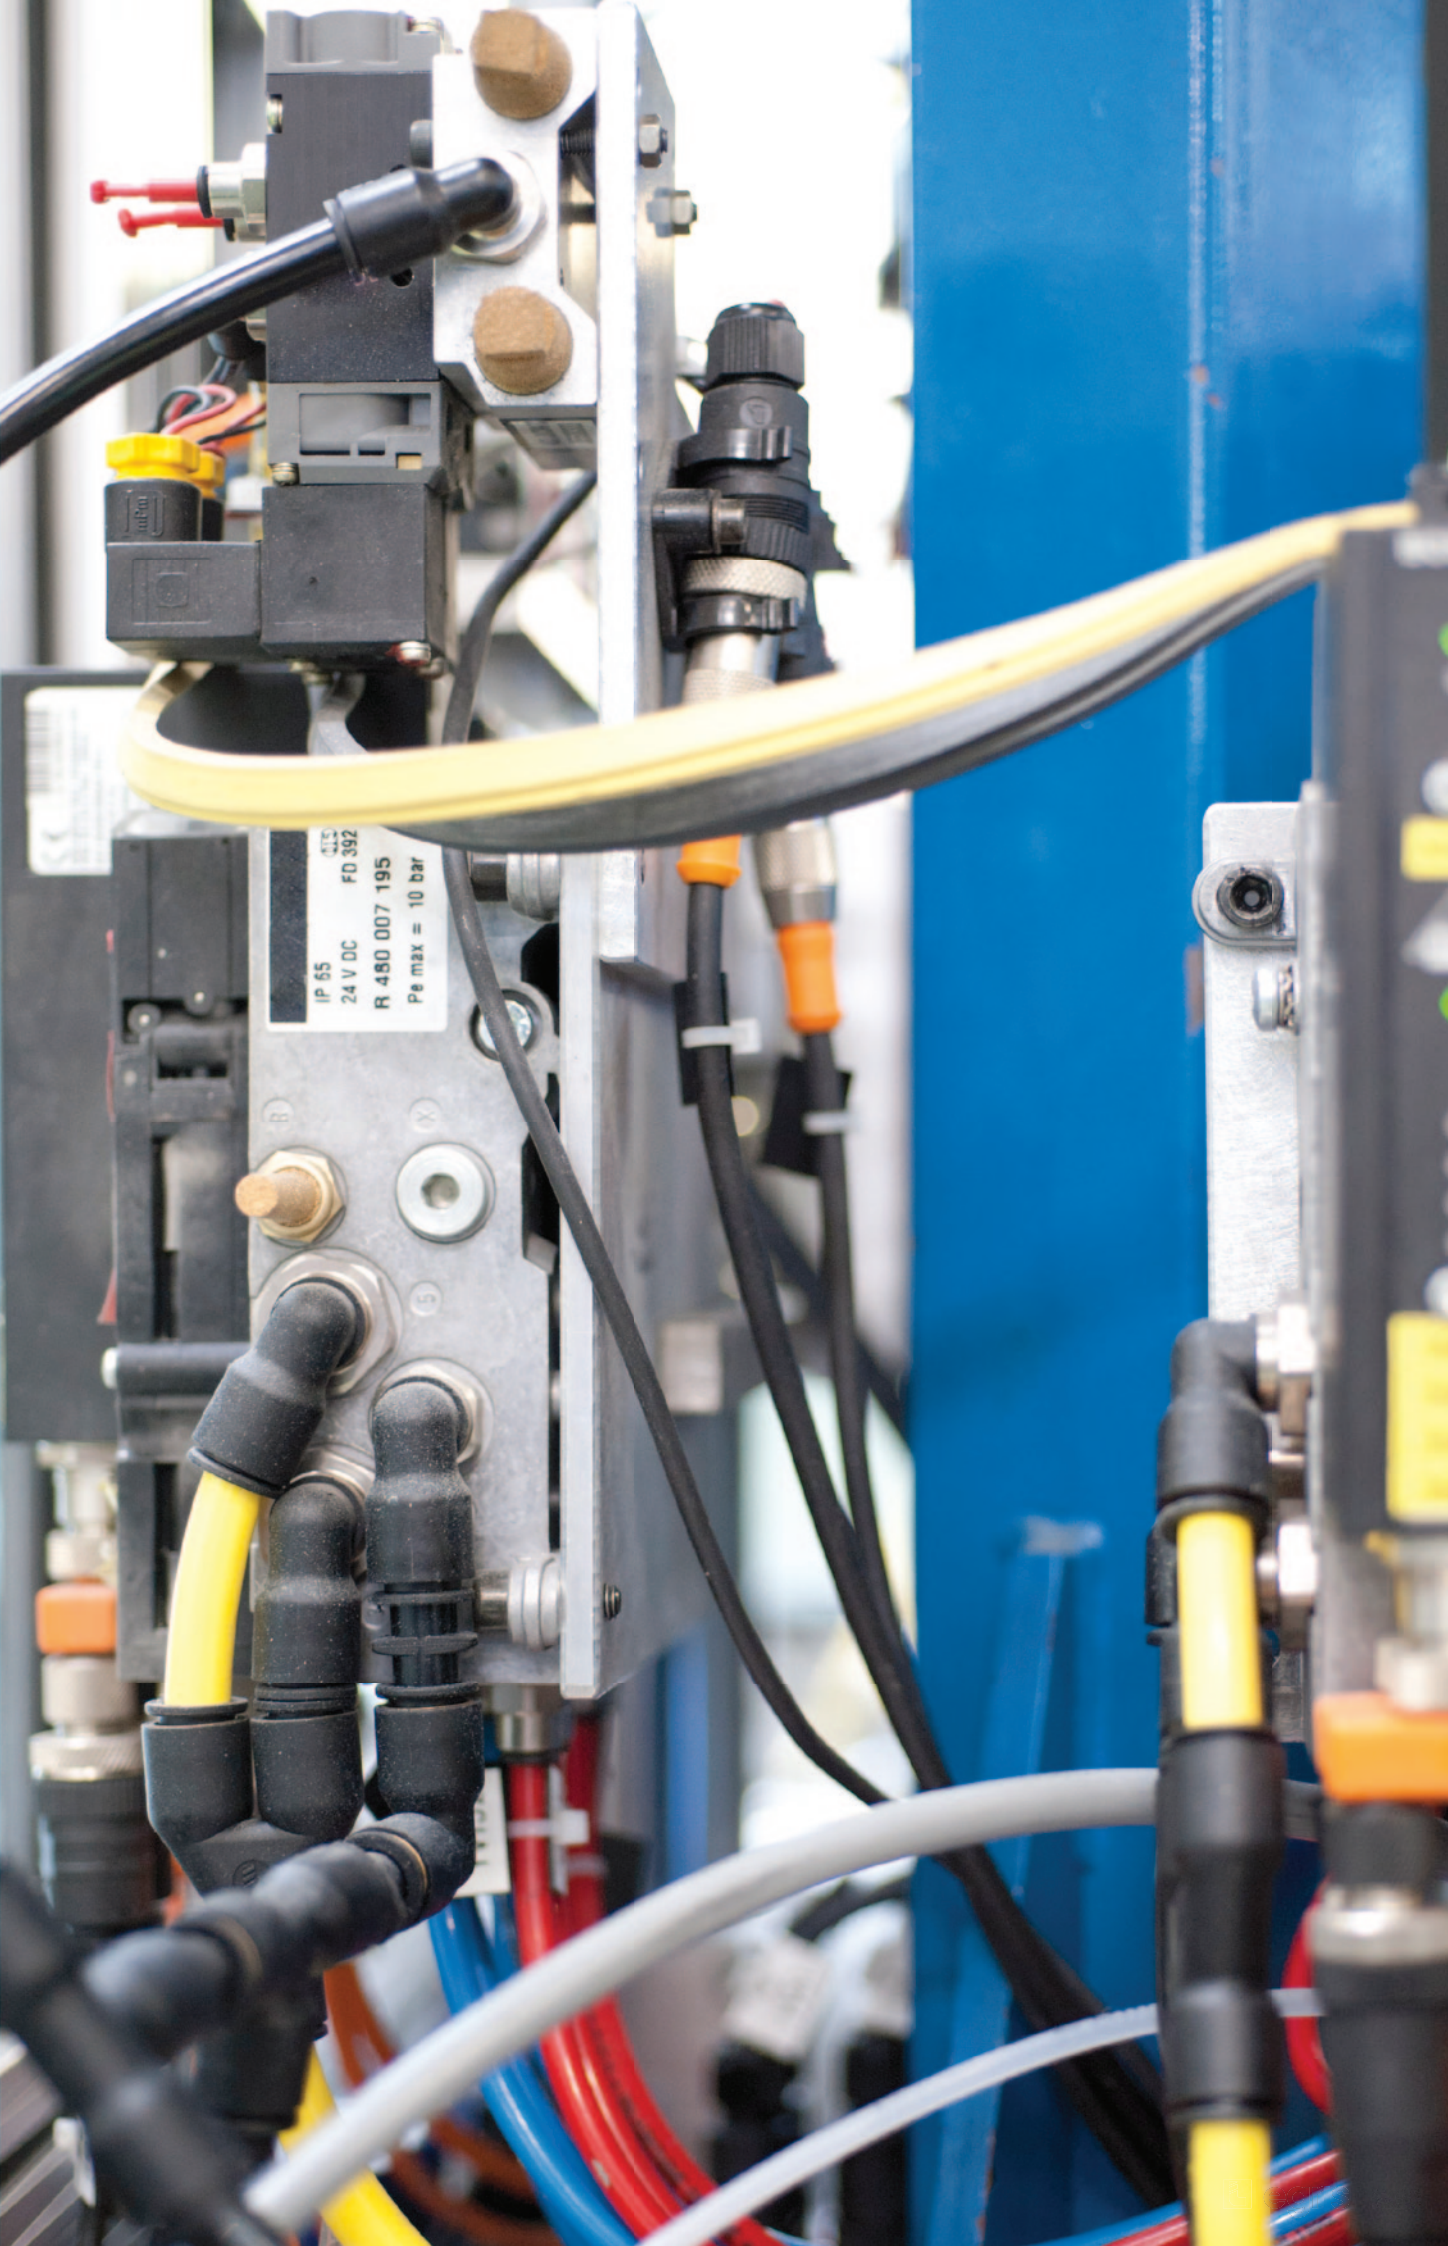
ØD



H K L N kg

4	3381 04 00	36.5	11	39.5	11.5	0.012
6	3381 06 00	36.5	11	39.5	11.5	0.008
8	3381 08 00	46	13	44.5	14.5	0.013

Start pressure test point on the system



Self-Sealing and Oscillating Fittings

Parker Legris has developed these two **innovative** push-in fittings in order to integrate various functions and allow **quick installation** on pneumatic circuits.

Product Advantages

Self-Sealing Fittings

Prevents fluid flow when there is no tube connected
Circuits may remain pressurised when being checked and maintained
When connected, the compressed air flow is restored in both directions

Oscillating Fittings

Rotation matched to cylinder rod stroke
Prevents tube wear due to excessive flexing
Optimum reliability and durability
Simplifies circuit assembly



Applications

- Robotics
- Automotive Process
- Pneumatics
- Semi-Conductors
- Textile
- Packaging

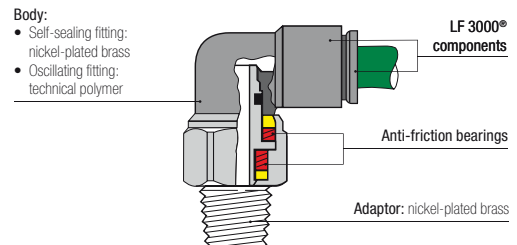
Technical Characteristics

Compatible Fluids	Compressed air Other fluids: please consult us
Working Pressure	Vacuum to 20 bar (10 bar: self-sealing fitting)
Working Temperature	-20°C to +80°C

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.
Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

Component Materials

Swivel Fitting



Silicone-free

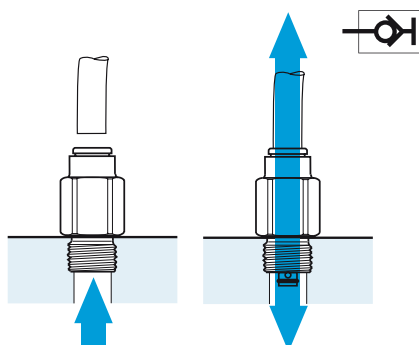
Regulations

ISO 14743: Pneumatic fluid power, push-in connectors for thermoplastic tubes
DI: 97/23/EC (PED)

DI: 2002/95/EC (RoHS),
2011/65/EC
DI: 1907/2006 (REACH)

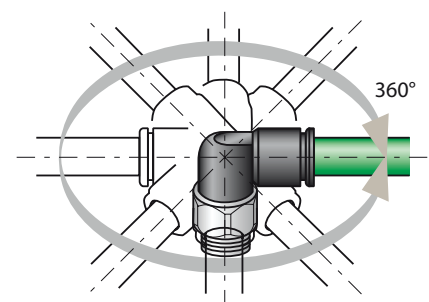
Installation Configurations

Self-Sealing Fitting



Oscillating Fitting

Tube O.D. (mm)	Torque (daN.m)	Max. Rotation Speed (turn/min.)
4	$<2.5 \cdot 10^{-3}$	190
6	$<4 \cdot 10^{-3}$	160
8	$<7 \cdot 10^{-3}$	120
10	$<11 \cdot 10^{-3}$	90
12	$<16 \cdot 10^{-3}$	80



Self-Sealing and Oscillating Fittings

LF 3000®

Push-In Fittings

3391 Self-Sealing Stud Fitting, Male BSPP Thread

Nickel-plated brass, NBR


ØD	C		E	F	H	H1	H2	ØT	kg
4	G1/8	3391 04 10	5	13	18	7.5	6	5	0.017
6	G1/8	3391 06 10	5	14	19.5	9	6	7.5	0.019
8	G1/8	3391 08 10	5	14	29.5	10	6	7.5	0.025
	G1/4	3391 08 13	5.5	16	25.5	11	8	9	0.032
10	G3/8	3391 10 17	5.5	20	27.5	13	11	10	0.055

Maximum working pressure: 10 bar

3091 Self-Sealing Stud Fitting, Male BSPT Thread



Nickel-plated brass, NBR




ØD	C		E	F	H	H1	ØT	kg
4	R1/8	3091 04 10	7.5	12	18	9.5	5	0.015
6	R1/8	3091 06 10	7.5	13	19.5	9.5	7.5	0.015
8	R1/8	3091 08 10	6.5	14	25	10.5	7.5	0.024
	R1/4	3091 08 13	11	14	25.5	13.5	9	0.021
10	R3/8	3091 10 17	11.5	17	27.5	14	10	0.035

Maximum working pressure: 10 bar

Pre-coated thread


3160 Self-Sealing Plug-In Fitting

	Technical polymer, NBR 	ØD		L	L1	kg
		4	3160 04 00	46	33.5	0.006
		6	3160 06 00	53.5	31	0.009
		8	3160 08 00	58	31	0.014

3159 Oscillating Elbow, Male BSPT Thread




Technical polymer, nickel-plated brass, NBR



ØD	C		F	G	H	L	kg
4	R1/8	3159 04 10	12	11	22	17.5	0.012
6	R1/8	3159 06 10	14	14	26.5	20.5	0.014
	R1/4	3159 06 13	14	14	23.5	20.5	0.022
8	R1/8	3159 08 10	17	16	32	23.5	0.036
	R1/4	3159 08 13	17	16	29	23.5	0.037
	R3/8	3159 08 17	17	16	25	23.5	0.033
10	R1/4	3159 10 13	19	19.5	37.5	29	0.053
	R3/8	3159 10 17	19	19.5	33.5	29	0.045
12	R1/4	3159 12 13	21	22	44.5	33.5	0.080
	R3/8	3159 12 17	21	22	41	33.5	0.070

Pre-coated thread

3189 Oscillating Elbow, Male BSPP and Metric Thread

	Technical polymer, nickel-plated brass, NBR 	ØD	C		E	F	G	H	L	kg
		4	M5x0.8	3189 04 19	3	12	11	24.5	17.5	0.012
			G1/8	3189 04 10	5	13	11	23	17.5	0.013
			M5x0.8	3189 06 19	3	12	14	27.5	20.5	0.017
		6	G1/8	3189 06 10	5	14	14	27	20.5	0.019
			G1/4	3189 06 13	5.5	16	14	25.5	20.5	0.023
			G1/8	3189 08 10	5	17	16	33.5	23.5	0.034
		8	G1/4	3189 08 13	5.5	17	16	31	23.5	0.034
			G3/8	3189 08 17	5.5	20	16	29.5	23.5	0.042
			G1/4	3189 10 13	5.5	19	19.5	39	29	0.058
		10	G3/8	3189 10 17	5.5	20	19.5	37	29	0.050
			G1/4	3189 12 13	5.5	21	22	46.5	33.5	0.074
			G3/8	3189 12 17	5.5	21	22	45.5	33.5	0.072

Accessories for Push-In Fittings

Parker Legris has designed these different accessories to improve **safety** and circuit **identification**.

Product Advantages

Safety

- Protection of operators and equipment
- Prevents accidental disconnection
- Disconnection only possible with tooling
- Resistance to grease and cleaning agents

Ergonomic

- Colour-coding for fluid circuit identification (6 colours)
- Setting and fixing of your circuits thanks to clips and release button covers
- Easy disconnection with tool where access is difficult
- Adapted to meet all installation configurations



Applications

- Robotics
- Automotive Process
- Pneumatics
- Semi-Conductors
- Textile
- Water Treatment
- Beverage Dispensers

Technical Characteristics

Compatible Ranges	LF 3000®, LIQUIfit®
Working Temperature	-20°C to +95°C
Materials	Tamper-proof safety clip, release button cover, clip: technical polymer Reducer and plug: nickel-plated brass

Installation Process

Tamper-Proof Safety Clip



Coloured Release Button Covers

Coloured release button covers can be mounted on LF 3000® and LIQUIfit® fittings, supplied fitted with manual release buttons.

5 colours are available and allows colour coding to be used throughout circuits.



Disconnection Tool

In cases where access is difficult, this tool can be particularly useful.



Clip Strips

Clips are also designed to fix LF 3000® fittings in series within a minimum of space.




The complete range of accessories can be found in Chapter 9.

Accessories for Push-In Fittings


LF 3000®

Push-In Fittings

3130 Tamper-Proof Safety Clip


Technical polymer	ØD							H	K	kg
	4	3130 04 01	3130 04 02	3130 04 03	3130 04 04	3130 04 05	3130 04 10	6.6	3	0.001
	6	3130 06 01	3130 06 02	3130 06 03	3130 06 04	3130 06 05	3130 06 10	7.8	3.1	0.001
	8	3130 08 01	3130 08 02	3130 08 03	3130 08 04	3130 08 05	3130 08 10	9.5	4.3	0.001
	10	3130 10 01	3130 10 02	3130 10 03	3130 10 04	3130 10 05	3130 10 10	10.8	4.2	0.002
	12	3130 12 01	3130 12 02	3130 12 03	3130 12 04	3130 12 05	3130 12 10	12.5	5.1	0.003
	14	3130 14 01	3130 14 02	3130 14 03	3130 14 04	3130 14 05	3130 14 10	15	6	0.004

CLIP Clip Strip for Tubes and Fittings

Technical polymer	ØD		H	K	N	kg
	4	CLIP 04 00	9	13.5	10.5	0.007
	6	CLIP 06 00	10.5	13	10.5	0.004
	8	CLIP 08 00	12.5	10.5	12	0.007
	10	CLIP 10 00	14	12	15	0.005
	12	CLIP 12 00	16.5	14	16.5	0.009
	14	CLIP 14 00	18	16	20.5	0.008

Delivered in boxes of 10 strips of the same diameter (complete with selftapping screws of 95 mm length)

3000 Disconnection Tool


Treated steel	H	H1	L	kg
	25	20	96	0.021
	3000 70 00			

For disconnecting LF 3000® tubing/fittings where access is difficult, we recommend the use of this disconnection tool.

3110 Coloured Release Button Covers


Technical polymer	ØD						kg
	4	3110 04 00	3110 04 02	3110 04 03	3110 04 04	3110 04 05	0.001
	6	3110 06 00	3110 06 02	3110 06 03	3110 06 04	3110 06 05	0.001
	8	3110 08 00	3110 08 02	3110 08 03	3110 08 04	3110 08 05	0.001
	10	3110 10 00	3110 10 02	3110 10 03	3110 10 04	3110 10 05	0.001
	12	3110 12 00	3110 12 02	3110 12 03	3110 12 04	3110 12 05	0.001
	14	3110 14 00	3110 14 02	3110 14 03	3110 14 04	3110 14 05	0.002

0178 Reducer, Male/Female BSPP and Metric Thread

Nickel-plated brass, NBR	C1	C2		E	F	L	kg
	M7x1	M5x0.8	0178 55 19	5	10	12	0.005
	G1/8	M5x0.8	0178 10 19	5	13	9	0.006
	G1/4	G1/8	0178 13 10	5.5	16	9.5	0.006
	G3/8	G1/8	0178 17 10	5.5	20	10.5	0.016
		G1/4	0178 17 13	5.5	20	10.5	0.011
	G1/2	G1/4	0178 21 13	7.5	24	12.5	0.024
		G3/8	0178 21 17	7.5	24	12.5	0.016
	G3/4	G1/2	0178 27 21	7.5	32	13.5	0.035

With integrated O-ring seal

0222 Internal Hex Plug, Male BSPP and Metric Thread

Nickel-plated brass, NBR	C		E	F	F1	H	kg
	M5x0.8	0222 19 00	3.5	8	2.5	7	0.002
	M7x1	0222 55 00	5	10	3	8.5	0.003
	G1/8	0222 10 00	5	13	5	8.5	0.006
	G1/4	0222 13 00	5.5	16	6	9.5	0.010
	G3/8	0222 17 00	5.5	20	8	10.5	0.019
	G1/2	0222 21 00	7.5	24	10	12	0.030

With integrated O-ring seal



LF 3200 (3 mm) Push-In Fittings Range

Stud Fittings

- 3281**
Metric
Page 1-41
- 3299**
Metric
Page 1-41
- 3229**
Metric
Page 1-41
- 3298**
Metric
Page 1-41
- 3293**
Metric
Page 1-41
- 3218**
Metric
Page 1-42

Tube-to-Tube Fittings and Accessories

- 3206**
Straight
Page 1-43
- 3202**
Elbow
Page 1-43
- 3204**
Tee
Page 1-43
- 3266**
Reducer
Page 1-43
- 3226**
Plug
Page 1-43

LF 3200: 3 mm

Push-In Fittings

LF 3200 Push-In Fittings (3 mm)

Miniature pneumatic installations are very precise and sensitive systems, having specific operating characteristics. Consequently, Parker Legris has developed this **ergonomic** range of brass push-in fittings for its **mechanical robustness** and **compactness**.

Product Advantages

Compact & Lightweight	25% smaller than other fittings on the market for optimum actuator dimensions Minimum weight for maximum efficiency Reduces energy consumption and limits actuator wear
Resistance & Performance	All brass components for excellent impact resistance Gripping system with collet for increased robustness and service life Excellent resistance to high operating pressures
Reliability	100% leak-tested in production Date coding to guarantee quality and traceability Ideal for very sensitive applications Corrosion-resistant



Applications

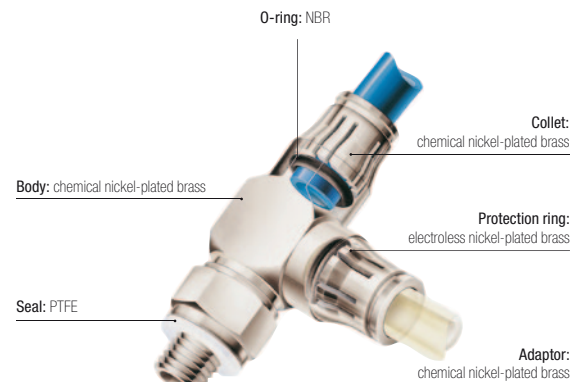
- Pneumatic Panels
- Robotics
- Semi-Conductors
- Textile
- Pneumatics
- Vacuum

Technical Characteristics

Compatible Fluids	Compressed air
Working Pressure	Vacuum to 20 bar
Working Temperature	-15°C to +80°C
Tightening Torque (daN.m)	0.01 to 0.1

Reliable performance is dependent upon the type of fluid conveyed, component materials and tubing being used.
Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).

Component Materials



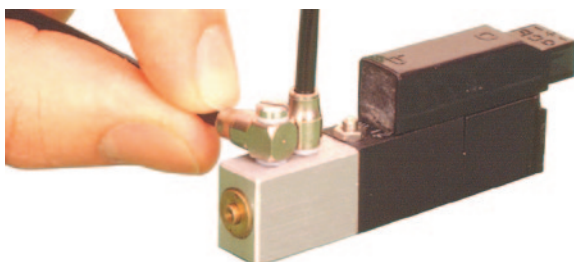
Silicone-free

Regulations

ISO 14743 ISO 14743: Pneumatic fluid power, push-in connectors for thermoplastic tubes

DI: 97/23/EC (PED)
DI: 2002/95/EC (RoHS), 2011/65/EC
DI: 94/9/EC (ATEX)
RG: 1907/2006 (REACH)

Installation Configurations




The LF 3200 fitting, connected with a 3 mm polyurethane or antistatic polyurethane tube, is the perfect solution for compact installations:


- which are highly stressed
- whose reliability is critical

Stud Fittings


3281 Stud Fitting, Male Metric Thread

	Nickel-plated brass, NBR 	ØD	C		F	G	H	kg
		3	M3x0.5	3281 03 09	1.5	6	9.5	0.001
			M5x0.8	3281 03 19	1.5	8	9.5	0.002


3299 Compact Stud Elbow, Male Metric Thread

	Nickel-plated brass, NBR 	ØD	C		F	G	H	J	L	kg
		3	M3x0.5	3299 03 09	6	6	13.5	6	13.5	0.004
			M5x0.8	3299 03 19	8	6	13	6	13.5	0.005


3229 Extended Stud Elbow, Male Metric Thread

	Nickel-plated brass, NBR 	ØD	C		F	G	H	J	L	kg
		3	M3x0.5	3229 03 09	6	6	16	6	13.5	0.004
			M5x0.8	3229 03 19	8	6	17	6	13.5	0.005

3298 Stud Branch Tee, Male Metric Thread

	Nickel-plated brass, NBR 	ØD	C		F	G	H	J	L	kg
		3	M3x0.5	3298 03 09	6	6	13.5	6	20.5	0.004
			M5x0.8	3298 03 19	8	6	13	6	20.5	0.005

3293 Stud Run Tee, Male Metric Thread


	Nickel-plated brass, NBR 	ØD	C		F	G	H	J	L	kg
		3	M3x0.5	3293 03 09	6	6	20	6	13.5	0.004
			M5x0.8	3293 03 19	8	6	20	6	13.5	0.005

LF 3200: 3 mm

Stud Fittings


3218

Single Banjo, Male Metric Thread


		Nickel-plated brass, NBR 	ØD	C			G	H	H1	J	L	kg
3				M3x0.5	3218 03 09		6	9.5	4	6	12.5	0.002
				M5x0.8			6	10.5	4.5	8	15	0.005

Tube-to-Tube Fittings and Accessories


3206 Equal Tube-to-Tube Connector

	Nickel-plated brass, NBR		ØD		G	L	kg
			3	3206 03 00	6	17	0.002


3202 Equal Elbow

	Nickel-plated brass, NBR		ØD		G	J	L	kg
			3	3202 03 00	6	6	13.5	0.003


3204 Equal Tee

	Nickel-plated brass, NBR		ØD		G	H	J	L	L1	kg
			3	3204 03 00	6	13.5	6	20.5	10.25	0.004

3266 Plug-In Reducer

	Nickel-plated brass, NBR, technical polymer		ØD	ØD1		G	L	L1	kg
			3	4	3266 03 04	6	28	19	0.001

3226 Blanking Plug

	Nickel-plated brass		ØD		L	L1	kg
			3	3226 03 00	20	10	0.001