

PA Recoil Tubing



The PA recoil tubing is an alternative to reels thanks to the remanence of the recoil shape given to the PA tubing.

Legris Ø metric: 6 to 8 mm
Rectulastic Ø metric: 4.7 to 15.8 mm

Legris PA Recoil Tubing

Technical Characteristics

- **Compatible Fluids:** Compressed air, lubricants, Other fluids: please consult us
- **Working Pressure:** Vacuum to 20 bar
- **Working Temperature:** -20°C to +80°C
- **Component Materials:** Polyamide (60 Shore D)

Reliable performance is dependent upon the type of fluid conveyed and fittings being used. Use is guaranteed with a vacuum of 755 mm Hg (99% vacuum).


Advantages

- Self-retractable due to the lasting memory of shape
- Protective spring to maintain tube integrity
- 2 colours for circuit identification

Regulations

Industrial: • PED • REACH • RoHS

Performance of Parker Legris PA Recoil Tubing

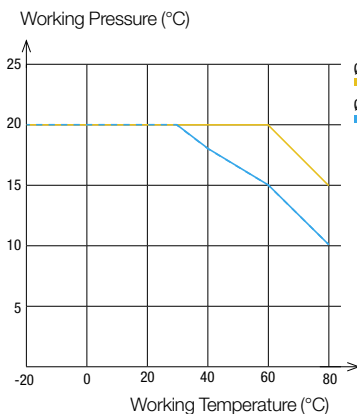

To calculate burst pressure, the values in these graphs should be multiplied by 3.

Tube O.D.	Passage	Tube O.D. Tolerance
6 mm	4 mm	+0.05/-0.10
8 mm	6 mm	+0.05/-0.10

Rectulastic PA Recoil Hose


Technical Characteristics

- **Material:** Polyamide 12
- **Compatible fluids:** Compressed air, Lubrification, grease/oil, Gasoline, Hydraulic, Vacuum, Chemicals (on request)
- **Working Pressure:** 15 bar
- **Working Temperature:** -40°C up to +90°C
- **Working Temperature for Tubing assembled:** -20°C to +70°C

Advantages

- Lightweight
- Wide temperature range
- Long service time
- Highly elasticity

Performance of Rectulastic Tubing

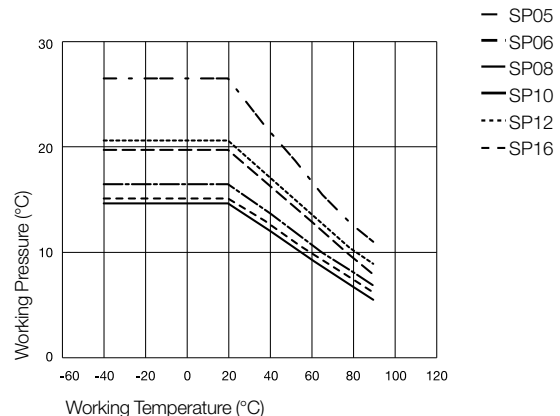

1470P Polyamide (PA) Recoil Tubing 2 m, Male BSPT Fitting

ØD ext.	ØD int.	C			Total Closed Length	O.D. of Coil	Kg
6	4	R1/4	1470P06 04 13	1470P06 07 13	520	60	0.143
8	6	R1/4	1470P08 04 13	1470P08 07 13	560	70	0.174

Length of long straight section: 300 mm
 Length of short straight section: 100 mm



1471P Polyamide (PA) Recoil Tubing 4 m, Male BSPT Fitting

ØD ext.	ØD int.	C			Total Closed Length	O.D. of Coil	Kg
6	4	R1/4	1471P06 04 13	1471P06 07 13	640	60	0.199
8	6	R1/4	1471P08 04 13	1471P08 07 13	720	70	0.249

Length of long straight section: 300 mm
 Length of short straight section: 100 mm


PA Recoil Tubing

1472P Polyamide (PA) Recoil Tubing 6 m, Male BSPT Fitting


ØD ext.	ØD int.	C			Total Closed Length	O.D. of Coil	Kg
6	4	R1/4	1472P06 04 13	1472P06 07 13	760	60	0.260
8	6	R1/4	1472P08 04 13	1472P08 07 13	880	70	0.329

Length of long straight section: 300 mm
Length of short straight section: 100 mm


SP../025 RECTULASTIC - Polyamide (PA) Coiled Hoses without Fittings 2.5 m

ØD ext.	ØD int.		O.D. of Coil
4.7	3.1	SP05/025	38
6.3	4.8	SP06/025	75
7.9	6.3	SP08/025	75
9.5	7.9	SP10/025	115
11.8	9.5	SP12/025	140


SP../050 RECTULASTIC - Polyamide (PA) Coiled Hoses without Fittings 5 m

ØD ext.	ØD int.		O.D. of Coil
4.7	3.1	SP05/050	38
6.3	4.8	SP06/050	75
7.9	6.3	SP08/050	75
9.5	7.9	SP10/050	115
11.8	9.5	SP12/050	140
15.8	12.7	SP16/050	220


SP../075 RECTULASTIC - Polyamide (PA) Coiled Hoses without Fittings 7.5 m

ØD ext.	ØD int.		O.D. of Coil
4.7	3.1	SP05/075	38
6.3	4.8	SP06/075	75
7.9	6.3	SP08/075	75
9.5	7.9	SP10/075	115
11.8	9.5	SP12/075	140
15.8	12.7	SP16/075	220


SP../100 RECTULASTIC - Polyamide (PA) Coiled Hoses without Fittings 10 m

ØD ext.	ØD int.		O.D. of Coil
4.7	3.1	SP05/100	38
6.3	4.8	SP06/100	75
7.9	6.3	SP08/100	75
9.5	7.9	SP10/100	115
11.8	9.5	SP12/100	140
15.8	12.7	SP16/100	220


SP../150 RECTULASTIC - Polyamide (PA) Coiled Hoses without Fittings 15 m

ØD ext.	ØD int.		O.D. of Coil
6.3	4.8	SP06/150	75
7.9	6.3	SP08/150	75
9.5	7.9	SP10/150	115
11.8	9.5	SP12/150	140
15.8	12.7	SP16/150	220

SP../225 RECTULASTIC - Polyamide (PA) Coiled Hoses without Fittings 22.5 m


ØD ext.	ØD int.		O.D. of Coil
6.3	4.8	SP06/225	75
7.9	6.3	SP08/225	75
9.5	7.9	SP10/225	115
11.8	9.5	SP12/225	140
15.8	12.7	SP16/225	220

SP../025/DV RECTULASTIC - Completely assembled with Swivel Fittings 2.5 m

ØD ext.	ØD int.	C		O.D. of Coil
4.7	3.1	R1/8	SP05/025/DV	38
7.9	6.3	R1/4	SP08/025/DV	75
9.5	7.9	R1/4	SP10/025/DV	115
11.8	9.5	R3/8	SP12/025/DV	140


Polyamide hose with swivel fittings and spring guards (Type DV)

SP../050/DV RECTULASTIC - Completely assembled with Swivel Fittings 5 m

ØD ext.	ØD int.	C		O.D. of Coil
4.7	3.1	R1/8	SP05/050/DV	38
7.9	6.3	R1/4	SP08/050/DV	75
9.5	7.9	R1/4	SP10/050/DV	115
11.8	9.5	R3/8	SP12/050/DV	140
15.8	12.7	R1/2	SP16/050/DV	220


Polyamide hose with swivel fittings and spring guards (Type DV)

SP../075/DV RECTULASTIC - Completely assembled with Swivel Fittings 7.5 m

ØD ext.	ØD int.	C		O.D. of Coil
4.7	3.1	R1/8	SP05/075/DV	38
7.9	6.3	R1/4	SP08/075/DV	75
9.5	7.9	R1/4	SP10/075/DV	115
11.8	9.5	R3/8	SP12/075/DV	140
15.8	12.7	R1/2	SP16/075/DV	220


Polyamide hose with swivel fittings and spring guards (Type DV)

SP../100/DV RECTULASTIC - Completely assembled with Swivel Fittings 10 m

ØD ext.	ØD int.	C		O.D. of Coil
4.7	3.1	R1/8	SP05/100/DV	38
7.9	6.3	R1/4	SP08/100/DV	75
9.5	7.9	R1/4	SP10/100/DV	115
11.8	9.5	R3/8	SP12/100/DV	140
15.8	12.7	R1/2	SP16/100/DV	220


Polyamide hose with swivel fittings and spring guards (Type DV)

SP../150/DV RECTULASTIC - Completely assembled with Swivel Fittings 15 m

ØD ext.	ØD int.	C		O.D. of Coil
7.9	6.3	R1/4	SP08/150/DV	75
9.5	7.9	R1/4	SP10/150/DV	115
11.8	9.5	R3/8	SP12/150/DV	140
15.8	12.7	R1/2	SP16/150/DV	220


Polyamide hose with swivel fittings and spring guards (Type DV)

SP../225/DV RECTULASTIC - Completely assembled with Swivel Fittings 22.5 m

ØD ext.	ØD int.	C		O.D. of Coil
7.9	6.3	R1/4	SP08/225/DV	75
9.5	7.9	R1/4	SP10/225/DV	115
11.8	9.5	R3/8	SP12/225/DV	140
15.8	12.7	R1/2	SP16/225/DV	220


Polyamide hose with swivel fittings and spring guards (Type DV)

SP../025/K+S RECTULASTIC - Completely assembled with Coupling and Plug 2.5 m

ØD ext.	ØD int.		O.D. of Coil
7.9	6.3	SP08/025/K+S	75
9.5	7.9	SP10/025/K+S	115
11.8	9.5	SP12/025/K+S	140


Polyamide hose with 26 series coupling and plug with spring guards

SP../050/K+S RECTULASTIC - Completely assembled with Coupling and Plug 5 m

ØD ext.	ØD int.		O.D. of Coil
7.9	6.3	SP08/050/K+S	75
9.5	7.9	SP10/050/K+S	115
11.8	9.5	SP12/050/K+S	140


Polyamide hose with 26 series coupling and plug with spring guards

SP../075/K+S RECTULASTIC - Completely assembled with Coupling and Plug 7.5 m

ØD ext.	ØD int.		O.D. of Coil
7.9	6.3	SP08/075/K+S	75
9.5	7.9	SP10/075/K+S	115
11.8	9.5	SP12/075/K+S	140


Polyamide hose with 26 series coupling and plug with spring guards

SP../100/K+S RECTULASTIC - Completely assembled with Coupling and Plug 10 m

ØD ext.	ØD int.		O.D. of Coil
7.9	6.3	SP08/100/K+S	75
9.5	7.9	SP10/100/K+S	115
11.8	9.5	SP12/100/K+S	140


Polyamide hose with 26 series coupling and plug with spring guards

SP../150/K+S RECTULASTIC - Completely assembled with Coupling and Plug 15 m

ØD ext.	ØD int.		O.D. of Coil
7.9	6.3	SP08/150/K+S	75
9.5	7.9	SP10/150/K+S	115
11.8	9.5	SP12/150/K+S	140

Polyamide hose with 26 series coupling and plug with spring guards

SP../225/K+S RECTULASTIC - Completely assembled with Coupling and Plug 22.5 m

ØD ext.	ØD int.		O.D. of Coil
7.9	6.3	SP08/225/K+S	75
9.5	7.9	SP10/225/K+S	115
11.8	9.5	SP12/225/K+S	140

Polyamide hose with 26 series coupling and plug with spring guards