


accessories

0178 reducer male to female, BSPP and metric thread



nickel-plated brass,
with integral 'O' ring seal




C1	C2		E	F	L	kg
M7x1	M5x0,8	0178 55 19	5	10	12	0,004
G1/8	M5x0,8	0178 10 19	5	13	9	0,005
G1/4	G1/8	0178 13 10	5,5	16	9,5	0,006
G3/8	G1/8	0178 17 10	5,5	20	10,5	0,016
G3/8	G1/4	0178 17 13	5,5	20	10,5	0,014
G1/2	G1/4	0178 21 13	7,5	24	12,5	0,024
G1/2	G3/8	0178 21 17	7,5	24	12,5	0,016
G3/4	G1/2	0178 27 21	7,5	32	13,5	0,035

0179 increaser male to female, BSPP and metric thread




nickel-plated brass,
with integral 'O' ring seal




C1	C2		E1	E2	F	L	kg
M12x1,5	G1/4	0179 67 13	6,5	8	16	18	0,005
G1/8	G1/4	0179 10 13	5	12	16	19	0,005
G1/4	G3/8	0179 13 17	5,5	15	20	23	0,006
G3/8	G1/2	0179 17 21	5,5	16	24	24	0,016

0222 threaded plug, BSPP and metric thread

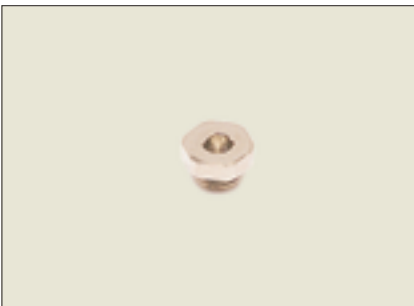

nickel-plated brass,
with integral 'O' ring seal




C		E	F	G	F2	H	H1	kg
M5x0,8	0222 19 00	3,5	8	9	2,5	7,1	4,1	0,004
M7x1	0222 55 00	5	10	11	3	8,5	4,7	0,005
G1/8	0222 10 00	5	13	14	5	8,6	6,4	0,005
G1/4	0222 13 00	5,5	16	17,5	6	9,5	7,4	0,007
G3/8	0222 17 00	5,5	20	22	8	10,5	8,4	0,012
G1/2	0222 21 00	7,5	24	26	10	12,1	9,9	0,019

Clip clip strips for tubes



plastic body



ØD		H	K	N	Number of clips per strip	Ø LF3000® to be clipped	kg
4	Clip 04 00	9	13,5	10,5	8		0,008
6	Clip 06 00	10,5	13	10,5	8		0,009
8	Clip 08 00	12,5	10,5	12	7	4	0,009
10	Clip 10 00	14	12	15	6	6	0,010
12	Clip 12 00	16,5	14	16,5	5		0,011
14	Clip 14 00	18	16	20,5	4	8	0,011

Delivered in boxes of 10 strips of the same diameter (complete with self-tapping screws of 9.5 mm length).

Legris clips are also designed to fix LF 3000® fittings in series within a minimum of space. Supplied in strips, clips can be separated by hand or with a tube cutter and enable the use of multiple clips, depending on the users' needs.

