

Butterfly Valves



The butterfly valve allows frequent operation with very low torque on circuits without retention zones.

Technical Characteristics

- **Compatible Fluids:** Compressed air, abrasive fluids
- **Working Pressure:** 0 to 16 bar
- **Working Temperature:** -20°C to +80°C


Reliable performance is dependent upon the type of fluid conveyed.

Advantages

- Compatible with abrasive fluids (including solid particles)
- Fluid flow direction marked (uni-directional)
- Small size
- Simple and efficient design

Component Materials

Silicone-free

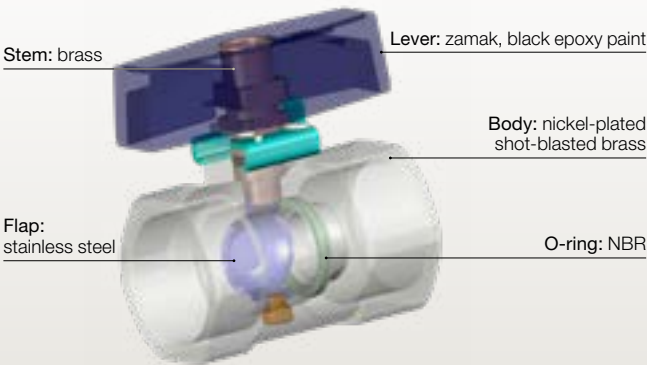


Regulations

- PED
- REACH
- RoHS

4602 2/2 Butterfly Shut-Off Valve, Female BSPP Thread

Nickel-plated brass, NBR



DN	C		E	F	H	L	M	Kg
6	G1/4	4602 06 13	9	17	35	34	54	0.102
7	G3/8	4602 07 17	11	22	35	39	54	0.136
10	G1/2	4602 10 21	12	24	37	42	54	0.140
13	G3/4	4602 13 27	14	30	40	49	54	0.208
18	G1	4602 18 34	15	41	46	55	54	0.412