




Compact industrial coupling system in brass for use with numerous gaseous and liquid media. High Flow valve for optimum flow and low pressure drop.

- Available on request:
 - with additional end connections
 - other seals for different temperature ranges and fluids



American Profile

KA Single Shut-Off

Working Pressure*:
up to 35 bar

Material:

- Coupling: Nickel plated brass
- Plug: Nickel plated brass
- Seals: NBR

Working Temperature:
-20°C up to +100°C (NBR)

Flow Rate Air:
9.000 l/min.
inlet pressure 6 bar, pressure drop 0.5 bar

Flow Rate Water:
125 l/min.
pressure drop 0.5 bar

KB Double Shut-Off

Working Pressure*:
up to 35 bar

Material:

- Coupling: Nickel plated brass
- Plug: Nickel plated brass
- Seals: NBR

Working Temperature:
-20°C up to +100°C (NBR)

Flow Rate Air:
3.000 l/min.
inlet pressure 6 bar, pressure drop 0.5 bar

Flow Rate Water:
33 l/min.
pressure drop 0.5 bar

KL Dry-break

Working Pressure*:
up to 8 bar

Material:

- Coupling: Nickel plated brass
- Plug: Nickel plated brass
- Seals: NBR

Working Temperature:
-20°C up to +100°C (NBR)

Flow Rate Water:
33 l/min.
pressure drop 0.5 bar


* maximum static working pressure with design factor 4 to 1.

Single Shut-Off / Double Shut-off

Single Shut-Off / Double Shut-off

39KBAW Coupler with valve, Male Thread


Nickel-plated brass, NBR

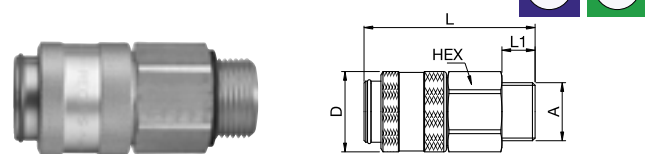

A		HEX	L	L1	D
G3/4	39KBAW26MPN	41	95	16	46
G1	39KBAW33MPN	41	98	19	46

39KBTF Coupler with valve, Hose Barb


Nickel-plated brass, NBR

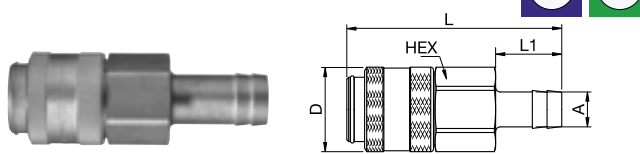


A		HEX	L	L1	D
19	39KBTF19MPN	41	115	36	46
25	39KBTF25MPN	41	125	48	46

39KBIW Coupler with valve, Female Thread

Nickel-plated brass, NBR

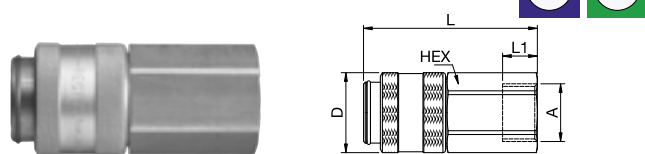


A		HEX	L	L1	D
G3/4	39KBIW26MPN	41	99	20	46
G1	39KBIW33MPN	41	100	20	46



Single Shut-Off

39SFAW Plug without valve, Male Thread


Nickel-plated brass




A		HEX	L	L1
G3/4	39SFAW26MXN	30	60	16
G1	39SFAW33MXN	34	65	19

39SFIW Plug without valve, Female Thread

Nickel-plated brass




A		HEX	L	L1
G1	39SFIW33MXN	41	68	24



Double Shut-off

39SBAW Plug with valve, Male Thread


Nickel-plated brass, NBR




A		HEX	L	L1
G3/4	39SBAW26MPN	41	92	16
G1	39SBAW33MPN	41	95	19

39SBIW Plug with valve, Female Thread

Nickel-plated brass, NBR




A		HEX	L	L1
G3/4	39SBIW26MPN	41	96	19
G1	39SBIW33MPN	41	97	24



Double Shut-off

39SBTF Plug with valve, Hose Barb

Nickel-plated brass, NBR




A		HEX	L	L1
19	39SBTF19MPN	41	114	36
25	39SBTF25MPN	41	124	48



Dry-Break

39KLAW Coupler with valve, Male Thread


Nickel-plated brass, NBR



A		HEX	L	L1	D
G3/4	39KLAW26MPN	41	95	16	46
G1	39KLAW33MPN	41	98	19	46

39KLIW Coupler with valve, Female Thread


Nickel-plated brass, NBR



A		HEX	L	L1	D
G3/4	39KLIW26MPN	41	99	20	46
G1	39KLIW33MPN	41	100	20	46

39KLTF Coupler with valve, Hose Barb

Nickel-plated brass, NBR




A		HEX	L	L1	D
19	39KLTF19MPN	41	115	36	46
25	39KLTF25MPN	41	125	48	46



Dry-Break

39SLAW Plug with valve, Male Thread

Nickel-plated brass, NBR



A 

HEX L L1

G3/4 **39SLAW26MPN**


41 92 16

G1 **39SLAW33MPN**

41 95 19

39SLIW Plug with valve, Female Thread

Nickel-plated brass, NBR



A 

HEX L L1

G3/4 **39SLIW26MPN**


41 96 16

G1 **39SLIW33MPN**

41 97 24

39SLTF Plug with valve, Hose Barb

Nickel-plated brass, NBR



A 

HEX L L1

19 **39SLTF19MPN**

41 114 36

25 **39SLTF25MPN**

41 124 48