





Industrial coupling with Atlas Copco-Profile. Coupling system with single-hand operation. High Flow valve for optimum flow and low pressure drop. Optimal for use with large pneumatic consumers due to the robust design and steel sleeve. The collar design minimises damage to the valve body.

- Available on request:
 - with additional end connections
 - other seals for different temperature ranges and fluids



Scandinavian Profile

Dust Protections  (P. 357)
for Coupling Part.-No. SK27S

 **KA** Single Shut-Off

Working Pressure*:
up to 35 bar

Material:


- Coupling: Nickel plated brass / steel
- Plug: Nickel plated steel
- Seals: NBR

Working Temperature:
-20°C up to +100°C (NBR)

Flow Rate Air:
2.550 l/min.
inlet pressure 6 bar, pressure drop 0.5 bar

Flow Rate Water:
30 l/min.
pressure drop 0.5 bar


* maximum static working pressure with design factor 4 to 1.




Single Shut-Off

34KAAK Coupler with valve, Male Thread

Nickel-plated brass/steel, NBR




A		HEX	L	L1	D
R3/8	34KAAK17SPN	24	70	12	28
R1/2	34KAAK21SPN	24	72	12	28
R3/4	34KAAK26SPN	27	72	12	28



Single Shut-Off

34KATF Coupler with valve, Hose Barb


Nickel-plated brass/steel, NBR

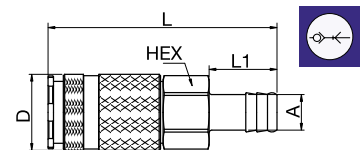


A		HEX	L	L1	D
10	34KATF10SPN	24	84	25	28
13	34KATF13SPN	24	84	25	28
16	34KATF16SPN	24	84	25	28
19	34KATF19SPN	24	84	25	28

34KAIW Coupler with valve, Female Thread

Nickel-plated brass/steel, NBR




A		HEX	L	L1	D
G3/8	34KAIW17SPN	24	64	12	28
G1/2	34KAIW21SPN	24	64	12	28
G3/4	34KAIW26SPN	32	68.5	14	28



Single Shut-Off

34SFAK Plug without valve, Male Thread

Nickel-plated steel



A




HEX L L1

R1/4	34SFAK13SXN	17	46	12
R3/8	34SFAK17SXN	19	46	12
R1/2	34SFAK21SXN	22	52	17

34SFIW Plug without valve, Female Thread

Nickel-plated steel



A




HEX L L1

G3/8	34SFIW17SXN	19	40	9
G1/2	34SFIW21SXN	24	44	12

34SFTF Plug without valve, Hose Barb

Nickel-plated steel



A



L L1 D

10	34SFTF10SXN	55	25	15
13	34SFTF13SXN	55	25	15