


Popular Combinations: Inlet pressure 145 psig (10 bar), secondary pressure 91.3 psig (6.3 bar), 14.5 psig (1 bar) pressure drop.




Filter + Regulator + Lubricator Combinations, poly bowl
5 micron element, 116 psig (8 bar) regulator + gauge and wall mounting brackets



Port Size	Flow	Manual Drain	Auto Drain
1/2"	90 scfm (43 dm³/s, ANR)	P33CB14GEMNGLNW	P33CB14GEANGLNW
3/4"	110 scfm (52 dm³/s, ANR)	P33CB16GEMNGLNW	P33CB16GEANGLNW



Filter/Regulator + Lubricator Combinations, poly bowl
5 micron element, 116 psig (8 bar) regulator + gauge and wall mounting brackets



Port Size	Flow	Manual Drain	Auto Drain
1/2"	110 scfm (52 dm³/s, ANR)	P33CA14GEMNGLNW	P33CA14GEANGLNW
3/4"	150 scfm (71 dm³/s, ANR)	P33CA16GEMNGLNW	P33CA16GEANGLNW




Ball Valve + Filter + Regulator + Lubricator Combinations, poly bowl
5 micron element, 116 psig (8 bar) regulator + gauge and wall mounting brackets



Port Size	Flow	Manual Drain	Auto Drain
1/2"	90 scfm (43 dm³/s, ANR)	P33QB14GEMNGLNW	P33QB14GEANGLNW
3/4"	110 scfm (52 dm³/s, ANR)	P33QB16GEMNGLNW	P33QB16GEANGLNW



Ball Valve + Filter/Regulator + Lubricator Combinations, poly bowl
5 micron element, 116 psig (8 bar) regulator + gauge and wall mounting brackets



Port Size	Flow	Manual Drain	Auto Drain
1/2"	110 scfm (52 dm³/s, ANR)	P33QA14GEMNGLNW	P33QA14GEANGLNW
3/4"	150 scfm (71 dm³/s, ANR)	P33QA16GEMNGLNW	P33QA16GEANGLNW

All combo are without any mounting nut on regulator or filter regulator.

Use end port blocks to convert a 3/4 BSPP combo to an NPT version


P33	C	B	1	6	G	E	M	N	G	L	N	W
Combination B/V + Combination Q Combination + B/V X Combination C						Thread Type BSPP 1		Port Size 1/2 4 3/4 6				
B/V = Ball valve												
Combination Type* F/R+L A F+Fc+Fa G F+R+L B F/R+Fc M F+Fc F												
* Combination type F = 5μ Fc = 1μ Fc = .01μ Fa = Adsorber												
Bowl Type † Poly Bowl With Bowl Guard G Metal Bowl Without Sight Gauge M* Metal Bowl With Sight Gauge S												
† For polycarbonate bowl, see caution in Engineering Section A.												
* Not available when using lubricator. Note: All bowl types are the same for each component. Example: If a "G" is specified for a F+L, both units would get a poly bowl with bowl guard.												
Element 0.01μ Element C 0.01μ Element with dpi D* 5μ Element E 1μ Element with dpi F* 1μ Element 9 5μ Element with dpi Q* Adsorber A												
* Not available with F/R.												
Drain Type Auto Drain A Manual Drain M												
Relief / Adjustment Non-Rising Knob Relieving N												
Adjustment Range With Round Gauge 30 psig; 2 bar; 0.2 MPa Z 60 psig; 4 bar; 0.4 MPa M 125 psig; 8 bar; 0.8 MPa G 250 psig; 17 bar; 1.7 MPa J*												
* Not available with poly bowl with bowl guard.												
Lub Type Oil Mist Standard Sight Dome L												
Drain Type No Drain; Closed End N												
Mounting No Bracket A Port Blocks C Port Blocks & Wall Brkt D Wall Bracket W												

Most Popular




Popular Combination Dimensions mm (inches)

P31C

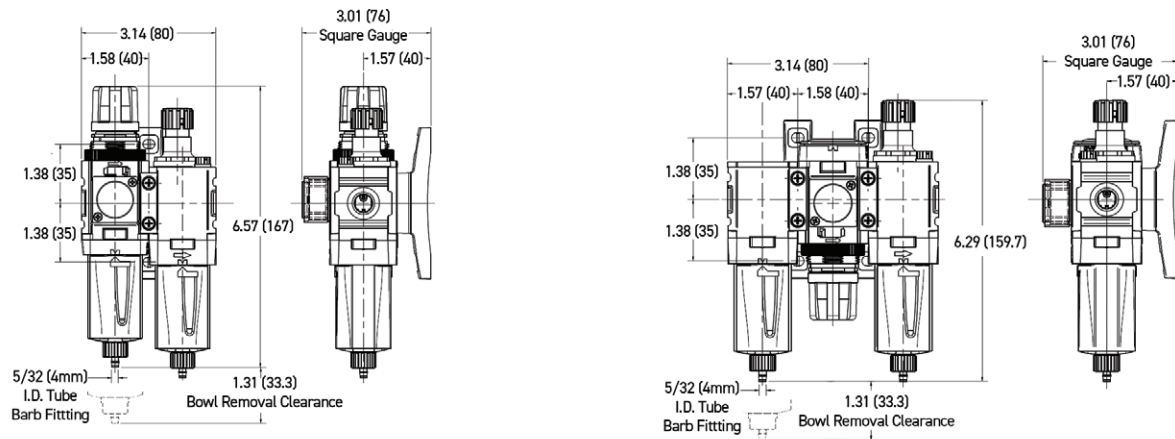

P32C

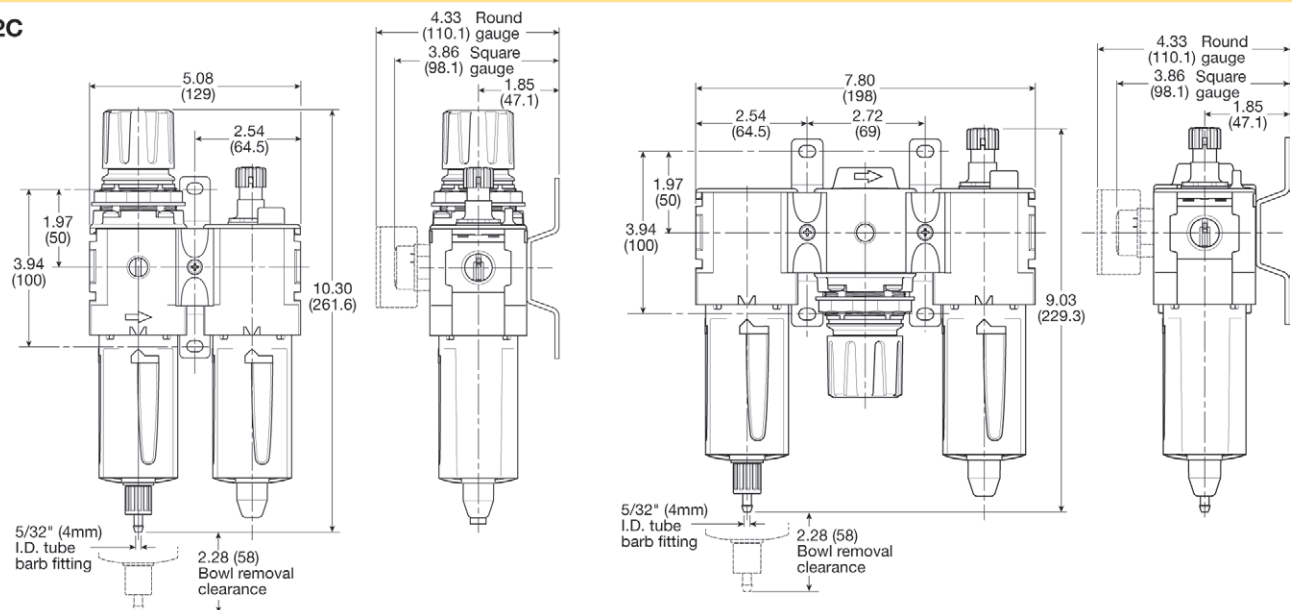

P33C

