



Ø
25
40

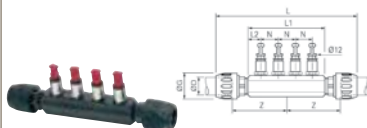

DISTRIBUITOR

Transair®	Ø D	Ø G	L	L1	L2	N	Z	E	S	Kg
6651 25 12 04	25	44,5	271	155	25	35	107	G3/4"	G3/8"	1,045
6651 40 12 04	40	67	400	210	30	50	150	G1"1/4	G1/2"	2,285


Distribuitoare cu 4 ieșiri, prevăzute cu 4 dopuri de Ø 12 mm

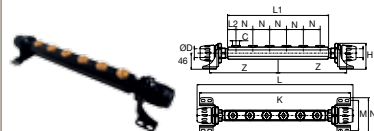

Transair®	Ø D	C	L	L1	L2	K	N	Z	H	M	Kg
6652 25 21 06	25	G1/2	463	300	25	448	50	204	74	86,5	2.300
6652 40 21 06	40	G1/2	526	310	30	469	50	217	83	104,5	3.800


Distribuitoare cu 6 ieșiri, prevăzute cu 6 dopuri G1/2"

Ø
63
76
100
168

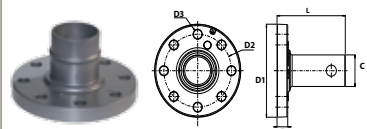


FLANȘĂ CIRCULARĂ DIN ALUMINIU EN-ISO

Transair®	Ø D	DN	Ø D1	Ø D2	Ø D3	E	L	Kg
RA30 63 00	63	65	185	145	18	23	146,5	1,636
RA30 L1 00	76	80	200	160	18	24,6	106,8	1,924
RA30 L3 00	100	100	220	180	18	24,6	106,8	2,277
RA31 L8 00	168	150	279	240	22,7	25,4	127,4	3,673
RA30 L8 K2	168	200	340	295	22	29,3	199,3	7,246

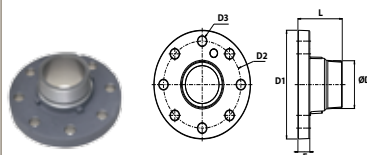

FLANȘĂ CIRCULARĂ DIN ALUMINIU EN-ISO CU ÎNFILETARE

Transair®	C	DN	Ø D1	Ø D2	Ø D3	E	L	Kg
RA33 L1 24	R3"	80	200	160	18	24,6	91,6	2,226
RA33 L3 24	R3"	100	220	180	18	24,6	91,6	2,644

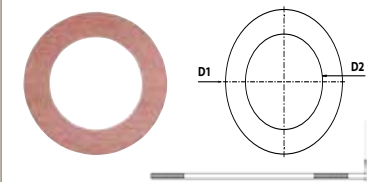

GARNITURĂ PENTRU FLANȘĂ DIN ALUMINIU

Transair®	DN	Pentru flanșă circulară	Ø D1	Ø D2	E	Kg
EW05 63 00	65	RA30 63 00	124	73	3	0,028
EW05 L1 00	80	RA30 L1 00 - RA33 L1 24	142	89	3	0,033
EW05 L3 00	100	RA30 L3 00 - RA33 L3 24	162	115	3	0,052
EW05 L8 00	150	RA31 L8 00	218	169	3	0,075
EW05 K2 00	200	RA30 L8 K2	273	220	3	0,110




KITURI DE ȘURUBURI PENTRU FLANȘĂ DIN ALUMINIU

Transair®	C	L	Număr de șuruburi	Kg
EW06 00 03	M16	90	x 8	1,820
EW06 00 08	M20	90	x 4	1,490

TABEL DE SELECȚIE A GARNITURILOR ȘI A KITURILOR DE ȘURUBURI PENTRU FLANȘĂ / ASAMBLAREA FLANȘEI

Transair®	Ø D/C	DN	Garnitură Cod piesă	Kit de șuruburi Cod piesă	Număr de kituri	Cuplu max. de strângere în Nm (C)
RA30 63 00	63	65	EW05 63 00	EW06 00 03	1 kit	80
RA30 L1 00	76	80	EW05 L1 00	EW06 00 03	1 kit	80
RA33 L1 24	R3"	80	EW05 L1 00	EW06 00 03	1 kit	80
RA33 L3 24	R3"	100	EW05 L3 00	EW06 00 03	1 kit	80
RA30 L3 00	100	100	EW05 L3 00	EW06 00 03	1 kit	80
RA31 L8 00	168	150	EW05 L8 00	EW06 00 08	2 kituri	200
RA30 L8 K2	168	200	EW05 K2 00	EW06 00 08	3 kituri	200



Aceste kituri pot fi utilizate pentru asamblarea racordurilor în cruce RA07 și RA44 de la pagina 33.